

LED & TREND  
EDITION 2023-24

VOL.02

# ALLOOKING


*automation solutions*

RELIABLE. LONG LIFE & HIGH EFFICIENCY

## WHAT IS ALLOOKING?

A brand who provides a variety of LED & AUTOMATION Solutions that are reliable, long lasting and efficient with the honour to build, market and cultivate on a global scale.



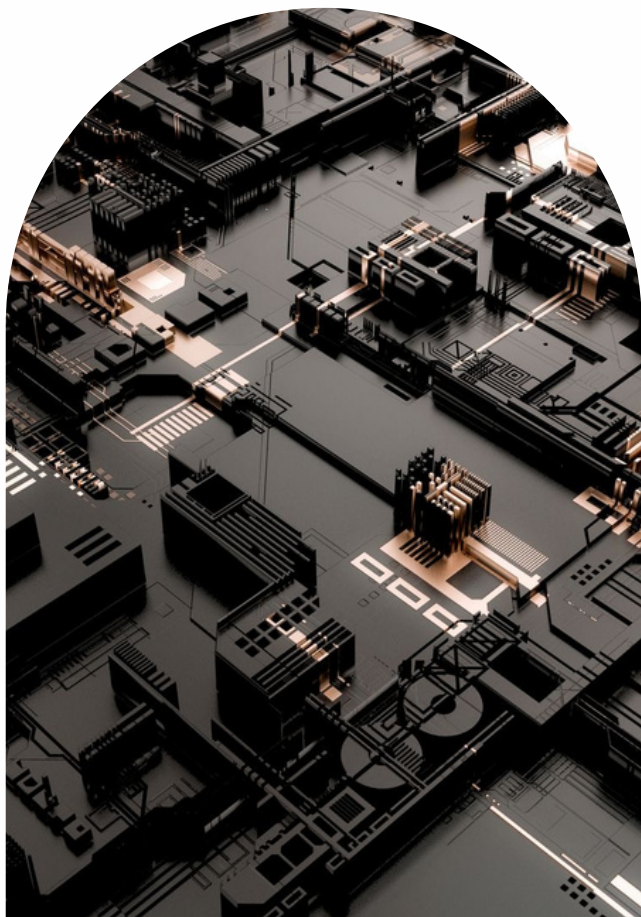

ALLOOKING specializes in designing, manufacturing and distributing LED Drivers for Commercial needs, including CC & CV TRIAC Dimming, 0/1-10V Dimming, DALI and more. Our commitment to social responsibility encourage us to offer reliable, stable & secure LED Drivers. We consider it an honour to develop, promote and cultivate "ALLOOKING" Brand globally. Our product development team is constantly working to enhance and create new products. We also conduct a number of tests to guarantee that the products we sell to our clients are of the highest caliber. The flawless proof of ALLOOKING is provided by CE, CB, CCC, CSACUS, SAA, TUV and BIS.

# INTRODUCTION

CONSTANT CURRENT

# TRIAC | PHASECUT



FLICKER FREE DIMMING RANGE OF NORMAL 10% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH PHASECUT AUTOMATIONS & REGULATOR DIMMING.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

MILLIAMPERE

VOLTAGE

6W	150mA	20-43V
6W	300mA	8-43V
8W	200mA	8-43V
10W	250mA	8-43V
12W	300mA	8-43V
10W	700mA	8-18V
15W	350mA	8-43V
16W	400mA	8-43V
18W	300mA	45-65V
20W	500mA	8-43V
30W	700mA	20-43V
30W	300mA	70-90V
40W	1000mA	20-43V
60W	1500mA	20-43V

CONSTANT CURRENT

# TRIAC | PHASECUT



FLICKER FREE DIMMING RANGE OF NORMAL 10% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH PHASECUT AUTOMATIONS & REGULATOR DIMMING.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

MILLIAMPERE

VOLTAGE

12W

300mA

8-43V

15W

350mA

8-43V

20W

500mA

22-43V

30W

700mA

22-43V

CONSTANT CURRENT

# 0/1-10V | ANALOGUE



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH ANALOGUE AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

MILLIAMPERE

VOLTAGE

8W	200mA	8-43V
12W	300mA	8-43V
10W	700mA	7-17V
15W	350mA	8-43V
18W	300mA	45-65V
20W	500mA	8-43V
30W	700mA	30-43V
35W	800mA	30-40V
42W	1050mA	30-40V

CONSTANT CURRENT

# DALI2 – DT6



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

MILLIAMPERE

VOLTAGE

6W - 12W

150mA - 300mA

8-43V

8W - 20W

200mA - 500mA

8-43V

10W

700mA

8-17V

40W

1000mA

20-40V

CONSTANT CURRENT

# DALI2 – DT8



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
POWER SUPPLY WITH DIMMING AND TUNING FUNCTIONS.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

MILLIAMPERE

VOLTAGE

8W - 20W

200mA - 500mA

8-43V



CONSTANT CURRENT

# TRACK DALI2 – DT8



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
POWER SUPPLY WITH DIMMING AND TUNING FUNCTIONS.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

20W

MILLIAMPERE

500mA

VOLTAGE

8-43V

CONSTANT CURRENT

# TRACK NON-DIMMABLE



TRACK EDP POWER SUPPLY.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.  
ADJUSTABLE CURRENT SUPPLY.  
WHITE BODY & BLACK BODY.

WATTAGE

MILLIAMPERE

VOLTAGE

3L 6W TO 12W  
3L 20W TO 40W

150mA TO 300mA  
550mA TO 900mA

8-43V  
8-43V

4L 6W TO 12W  
4L 20W TO 40W

150mA TO 300mA  
550mA TO 900mA

8-43V  
8-43V

CONSTANT CURRENT

# NON-DIMMABLE



HIGH RELIABILITY TO ASSURE LED LONG LIFE.

PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

MILLIAMPERE

VOLTAGE

6W TO 12W

150mA TO 300mA

30-40V

15W TO 20W

350mA TO 500mA

30-40V

20W TO 40W

550mA TO 900mA

30-40V

6W TO 12W

550mA TO 700mA

10-18V

CONSTANT VOLTAGE

# TRIAC | 0/1-10V | PWM



FLICKER FREE DIMMING WITH RANGE OF NORMAL 10% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH PHASECUT/ANALOGUE AUTOMATIONS & REGULATOR DIMMING.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

VOLTAGE

AMPERE

75W	12V	6.25A
75W	24V	3A
100W	12V	8.3A
100W	24V	4A
150W	12V	12.5A
150W	24V	6.25A
200W	12V	16.7A
200W	24V	8.3A

CONSTANT VOLTAGE

# DALI2 – DT6



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

VOLTAGE

AMPERE

75W	12V	6.25A
75W	24V	3A
100W	12V	8.3A
100W	24V	4A
150W	12V	12.5A
150W	24V	6.25A
200W	12V	16.7A
200W	24V	8.3A

CONSTANT VOLTAGE

# DALI2 – DT8



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
POWER SUPPLY WITH DIMMING & TUNING FUNCTIONS.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

VOLTAGE

AMPERE

100W

24V

4A

200W

24V

8.3A

CONSTANT VOLTAGE

# TRIAC | 0/1-10V | PWM



FLICKER FREE DIMMING WITH RANGE OF NORMAL 10% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH PHASECUT/ANALOGUE AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.

WATTAGE

VOLTAGE

AMPERE

75W

48V

1.5A

100W

48V

2A

150W

48V

3.1A

200W

48V

4.1A

CONSTANT VOLTAGE

# DALI2 – DT6



FLICKER FREE DIMMING WITH RANGE OF NORMAL 0% TO 100% FULL LOAD CONDITION AT 230V.  
COMPATIBLE WITH DALI AUTOMATIONS.  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

VOLTAGE

AMPERE

75W

48V

1.5A

100W

48V

2A

150W

48V

3.1A

200W

48V

4.1A



CONSTANT VOLTAGE

# NON-DIMMABLE



POWER SUPPLY IP20  
HIGH RELIABILITY TO ASSURE LED  
LONG LIFE.  
PROTECTIONS SHORT CIRCUIT /  
OVER LOAD / OVER VOLTAGE /  
OVER TEMPERATURE.

WATTAGE

VOLTAGE

AMPERE

60W	12V	5A
60W	24V	2.5A
100W	12V	8.3A
100W	24V	4A
150W	12V	12.5A
150W	24V	6.25A
200W	12V	16.7A
200W	24V	8.3A
250W	12V	21A
250W	24V	10.5A
300W	12V	25A
300W	24V	12.5A

CONSTANT VOLTAGE

# NON-DIMMABLE



POWER SUPPLY IP20  
HIGH RELIABILITY TO ASSURE LED  
LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER  
LOAD / OVER VOLTAGE / OVER  
TEMPERATURE.

WATTAGE

VOLTAGE

AMPERE

60W

48V

1.25A

100W

48V

2A

150W

48V

3.1A

CONSTANT VOLTAGE

# NON-DIMMABLE



POWER SUPPLY IP67  
HIGH RELIABILITY TO ASSURE LED  
LONG LIFE.  
PROTECTIONS SHORT CIRCUIT /  
OVER LOAD / OVER VOLTAGE /  
OVER TEMPERATURE.



IP67

WATTAGE

VOLTAGE

AMPERE

60W

12V

5A

60W

24V

2.5A

100W

12V

8.3A

100W

24V

4A

150W

12V

12.5A

150W

24V

6.25A

200W

12V

16.7A

200W

24V

8.3A

250W

12V

21A

250W

24V

10.5A

300W

12V

25A

300W

24V

12.5A

LITEX

CONSTANT VOLTAGE

# ECO-SERIES NON-DIMMABLE



POWER SUPPLY IP20  
HIGH RELIABILITY TO ASSURE LED  
LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER  
LOAD / OVER VOLTAGE / OVER  
TEMPERATURE.

WATTAGE

VOLTAGE

AMPERE

60W	12V	5A
60W	24V	2.5A
100W	12V	8.3A
100W	24V	4A
150W	12V	12.5A
150W	24V	6.25A
200W	12V	16.7A
200W	24V	8.3A
300W	12V	25A
300W	24V	12.5A

CONSTANT CURRENT

# BLUETOOTH



FLICKER FREE DIMMING WITH RANGE OF NORMAL 10% TO 100% FULL LOAD CONDITION AT 230V.  
POWER SUPPLY WITH DIMM AND TUNING FUNCTIONS.  
COMPATIBLE WITH ANDROID / IOS BLUETOOTH DEVICES..  
HIGH RELIABILITY TO ASSURE LED LONG LIFE.  
PROTECTIONS SHORT CIRCUIT / OVER LOAD / OVER VOLTAGE / OVER TEMPERATURE.



WATTAGE

MILLIAMPERE

VOLTAGE

8W

200mA

30-40V

12W

300mA

30-40V

20W

500mA

30-40V









 OUT OF INDIA



 Lokendra Singh  
+91 98671 07743

 Jayant Patel  
+91 91362 69458

 Dinesh Patel  
+91 77009 62822

*Contact Us..*

[info@litexlighting.in](mailto:info@litexlighting.in)

[www.litexlighting.com](http://www.litexlighting.com)