

MINI MOTION SENSOR LIGHT SWITCH (QS-05B)

SPECIFICATION:

- Working Voltage :100-240V
- Load Power :?40W
- Sensing distance: 3-5M
- Mounting Hole Diameter:25mm/0.98 Inch



LED LIGHT NIGHT LAMP (QS-NSL01)

SPECIFICATION:

- ENERGY EFFICIENT
- THE PERFECT BRIGHTNESS
- EXTREMELY COMPACT
- SMART ILLUMINATION



DIN RAIL MOUNTED ANALOG TIMER SWITCH

SPECIFICATION:

- 24 HOUR PROGRAMMABLE
- MINIMUM 30 MINUTE INTERVAL
- WORKING VOLTAGE 220V AC
- FREQUENCY 50Hz
- LOAD CAPACITY
- RELIABLE AUTOMATION
- QUARTZ BASED
- HIGH QUALITY HEAVY DUTY 16Amps RELAY



MICROWAVE WAREHOUSE SENSOR (QS-M8)

SPECIFICATION:

- Detection Angle: 360°
- Detection Range: 50%, 100%(choice)
- Power Frequency: 50/60Hz
- Voltage: 110-277V/AC
- Detection Motion Speed: 0.6-1.5m/s
- Installing Height: 4-15m
- Rated Load: Max.2000W (220-277V/AC)



MOTION SENSOR LIGHT (QS-RMSL02)

SPECIFICATION:

- Widely Application
- Brightness
- USB Rechargeable Battery
- ON/AUTO/OFF Three Modes
- Install in Seconds



PIR MOTION SENSOR (QS-08)



SPECIFICATION:

- Power Source: 220-240V/AC
- Detection Range: 360°
- Working Temperature: -20~+40°C
- Ambient Light: <10-2000LUX (adjustable)
- Detection Moving Speed: 0.6-1.5m/s
- Installation Height: 2.2-4m
- Power Consumption: approx 0.9W



QUICK SENSE

amazon
Selling partner

PIR SENSOR QS-12



SPECIFICATIONS:

Operating Volt: 220V/AC-250V/AC

Load power: 300/1200w Max

Ambient Light: 3-2000 (Adjustable)


Load Type: Incandescent lamp, LED light CFL, Fans

Detecting Distance : 3-12m (<24°C) adjustable

Detecting Angle: 360°Degree

Installation Hight : 2.2-4 Mtr

Delay :10 Seconds -7Minutes (Adjustable)

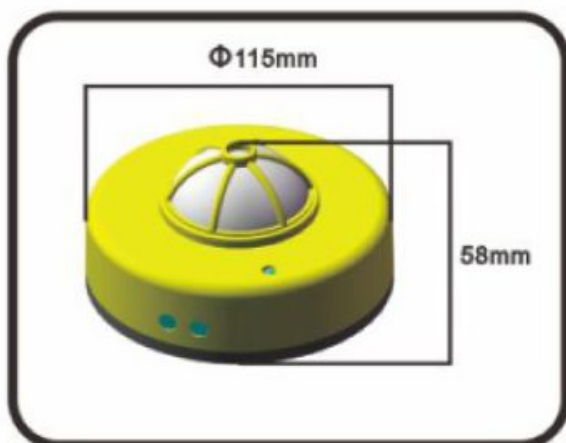

PLUG-IN COUNTDOWN OFF DELAY TIMER



SPECIFICATION:

- Operating Volt: 220 Volt/ 50 Hz
- Output Current: 10 Amp
- Operating Temperature: 20 to + 80 Deg C
- Current Consumption: 0.015 mA mm
- Relative Humidity: less than 95%
- Socket Type: Indian Standard

WIRELESS 10 LED CABINET LIGHTS MOTION SENSOR (QS-RMSL03)

SPECIFICATION:

- Widely Application
- Brightness
- USB Rechargeable Battery
- ON/AUTO/OFF Three Modes
- Install in Seconds



WATERPROOF MICROWAVE SENSOR(QS-M7)

SPECIFICATION:

- Power Sourcing: 220 -240V/AC
- Detection Range: 180°
- Power Frequency: 50/60Hz Detection
- Distance: 5-15m (adjustable)
- Ambient Light: <3-2000LUX (adjustable)
- Time Delay: Min. 10sec±3 sec
- Rated Load: 1200W

