


LED Lighting

**ARCHITECTURAL | PROJECTS
COMMERCIAL | HOSPITALITY**

EDITION 2022

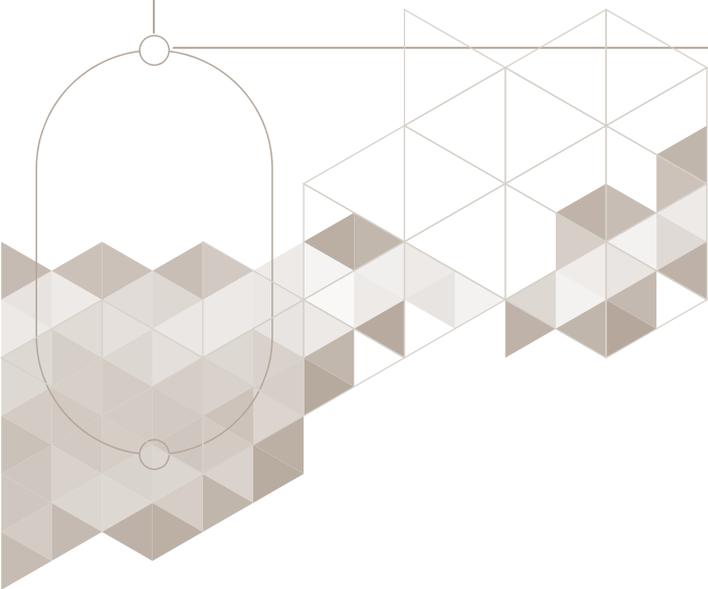

OUR PRODUCTS



SATISFACTORY



QUALITY PRODUCTS



ABOUT COMPANY

GIVE LIGHT AND PEOPLE WILL FIND THE WAY!

Welcome to the world of Litex Lighting -
The intelligent way of brightening up lives

Since its incorporation in 2012, LITEX has
been indulged in offering salient designs and
finest variety of Dimmable Solutions & LED
Lightings.

With stunning designs and ideal
combination of lighting solutions, we aim to
deliver innovative and diverse portfolio.
From residential and exterior / outdoor
projects to corporate / commercial
establishments and industries, we empower
the world to illuminate.


Our long term experience has enabled us to
provide client centered and focus control
technology lighting solutions and we take
great pride in the superior quality of our
products being offered. It's our privilege to
work through a channel of retail showrooms
in India and over 1000+ Interior Designers
and Architects for shaping the future of
better everyday life.

Go for the smartest lighting solution
Move forward. Be LED.

QUALITY

SATISFACTORY

PROFESSIONALISM

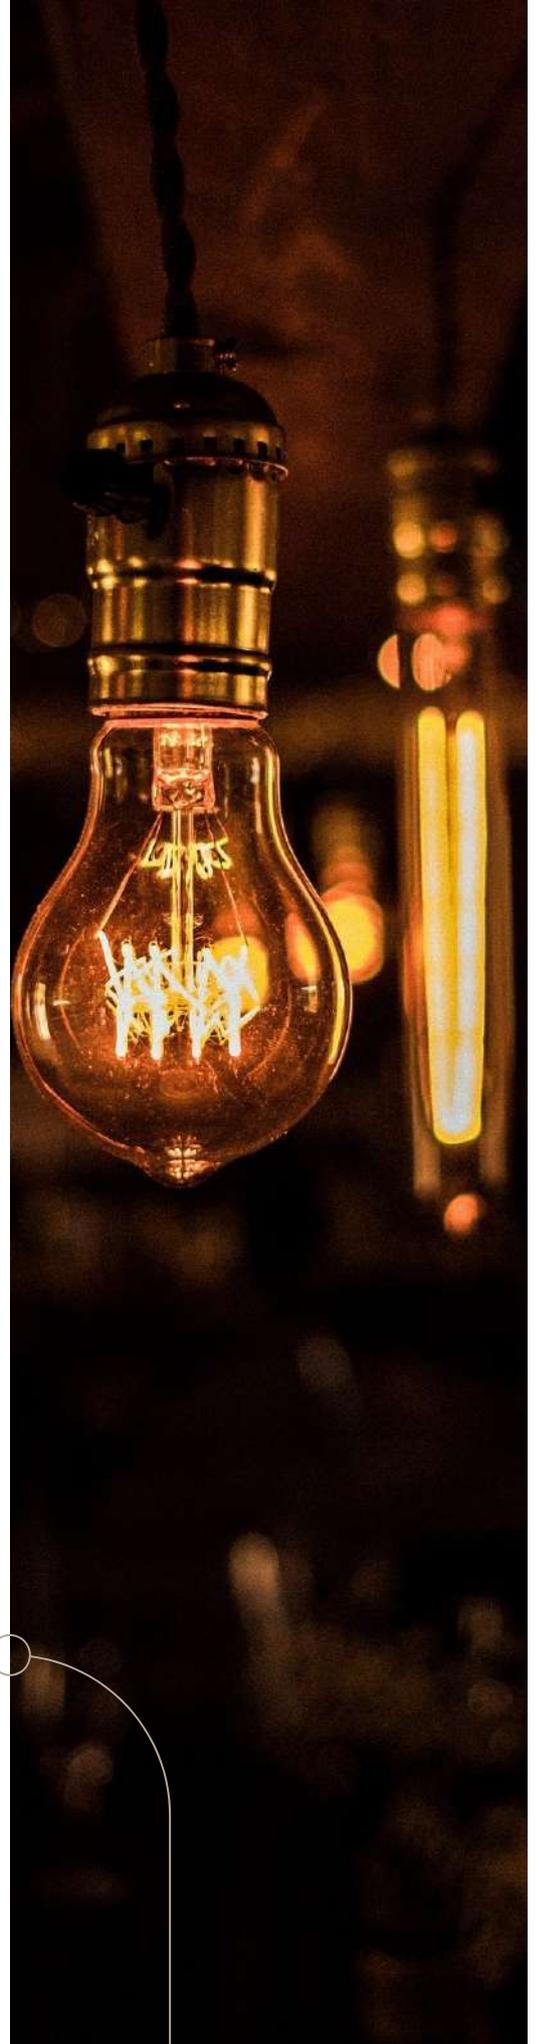




LED LIGHTING SOLUTIONS

OUR MASTER PIECE



DIMMABLE SOLUTIONS

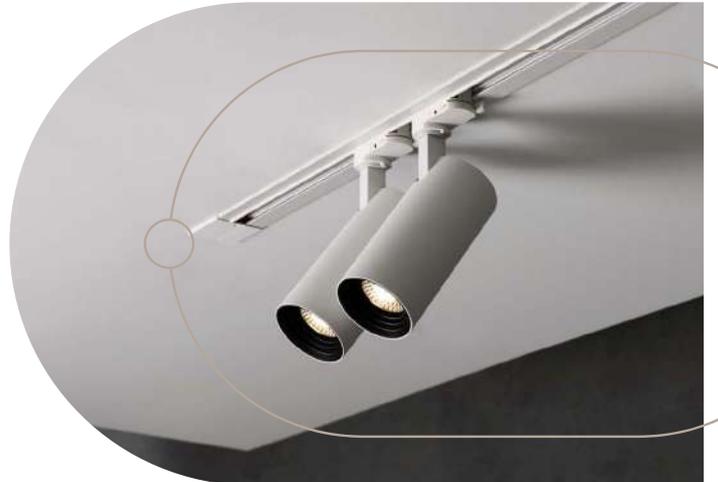



CONTENT

● ALLOOKING DIMMABLE DRIVER	01-08
● SMPS	09-16
● STRIP LIGHT	17-26
● NEO FLEX	27-36
● LED NEO FLEX	37-38
● LED WALL GLAZER	39-42
● SMART HOMES (BLUETOOTH SERIES)	43-54
● CABINET LIGHT	55-64
● COB DOWNLIGHT	65-76
● WALL WASHERS	77-80
● COB SURFACE LIGHT	81-88
● MR 16 LAMP & HOUSING	89-100
● ZOOM LIGHT	101-104
● TRACK LIGHTS	105-115
● TRACK CHANNELS & ACCESSORIES	116-121
● PANEL SERIES	122-127
● FOOT LIGHT	128-135
● WALL LIGHT	136-162

DESCRIPTION

WARM WHITE



NATURAL WHITE



COOL WHITE



TUNABLE



DIMMABLE



BLUETOOTH



IP RATING




ALLOOKING

RELIABLE LONGLIFE HIGH EFFICIENCY

DIMMABLE DRIVERS

PHASE CUT / TRIAC | ANALOGUE / 0 - 10V / PWM | DALI

• PHASE CUT | TRIAC

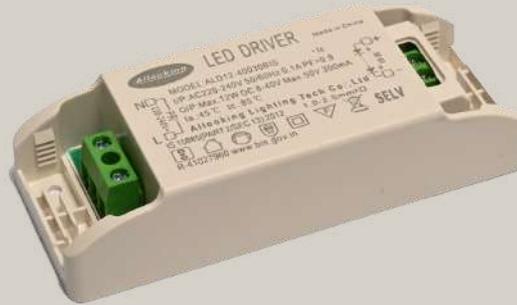

PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
6W	PHASE CUT / TRIAC	150 MA	8 - 43 V	118MM X 30MM X 20MM
6W	PHASE CUT / TRIAC	300 MA	8 - 20 V	105MM X 44MM X 25MM
8W	PHASE CUT / TRIAC	200 MA	8 - 43 V	100MM X 40MM X 23MM
10W	PHASE CUT / TRIAC	250 MA	8 - 43 V	100MM X 40MM X 23MM
12W	PHASE CUT / TRIAC	300 MA	8 - 43 V	100MM X 40MM X 22MM
10W	PHASE CUT / TRIAC	700 MA	8 - 26 V	100MM X 38MM X 22MM
15W	PHASE CUT / TRIAC	350 MA	8 - 43 V	100MM X 40MM X 23MM
16W	PHASE CUT / TRIAC	400 MA	8 - 43 V	104MM X 44MM X 25MM
18W	PHASE CUT / TRIAC	300 MA	45 - 65 V	104MM X 44MM X 25MM
20W	PHASE CUT / TRIAC	500 MA	8 - 43 V	104MM X 44MM X 25MM
30W	PHASE CUT / TRIAC	700 MA	20 - 43 V	140MM X 48MM X 30MM
30W	PHASE CUT / TRIAC	300 MA	70 - 90 V	115MM X 45MM X 25MM
40W	PHASE CUT / TRIAC	1000 MA	20 - 43 V	140MM X 45MM X 30MM
60W	PHASE CUT / TRIAC	1500 MA	20 - 43 V	120MM X 70MM X 30MM

• ROUND PHASE CUT | TRIAC



PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X H)
12W	PHASE CUT / TRIAC	300 MA	8 - 43 V	52 MM X 25 MM
20W	PHASE CUT / TRIAC	500 MA	8 - 43 V	65 MM X 25 MM
30W	PHASE CUT / TRIAC	700 MA	8 - 43 V	65 MM X 25 MM


- ANALOGUE DRIVER / 0-10V / PWM



PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
8W	ANALOGUE / 0-10 / PWM	200 MA	8 - 43 V	115 MM X 40 MM X 25MM
12W	ANALOGUE / 0-10 / PWM	300 MA	8 - 43 V	115 MM X 40 MM X 25MM
18W	ANALOGUE / 0-10 / PWM	300 MA	45 - 65 V	115 MM X 40 MM X 25MM
20W	ANALOGUE / 0-10 / PWM	500 MA	8 - 43 V	115 MM X 40 MM X 25MM
10W	ANALOGUE / 0-10 / PWM	700 MA	7 - 17 V	115 MM X 40 MM X 25MM
30W	ANALOGUE / 0-10 / PWM	700 MA	33 - 43 V	140 MM X 45 MM X 25MM
35W	ANALOGUE / 0-10 / PWM	800 MA	30 - 40 V	140 MM X 45 MM X 25MM
42W	ANALOGUE / 0-10 / PWM	1050 MA	30 - 40 V	140 MM X 45 MM X 25MM

- DALI DT6

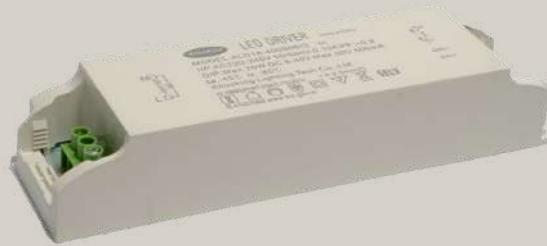

PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
8-20W	DALI DT6	200 TO 500 MA (ADJUSTABLE)	8 - 43 V	155MM X 40MM X 25MM

- DALI DT8



PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
8-20W	DALI DT8 (TUNABLE & DIMMABLE)	200 TO 500 MA (ADJUSTABLE)	8 - 43 V	155MM X 40MM X 25MM

- DALI DT8 TRACK DIMMABLE



BODY COLOR - BLACK

PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
20W	DALI DT8 (TUNABLE & DIMMABLE)	500 MA (ADJUSTABLE)	8 - 43 V	-

- BLUETOOTH DRIVER



PRODUCT SPECIFICATION

WATTS	DESCRIPTION	CURRENT (MA)	VOLTAGE	DIMENSIONS (L X W X H)
8W	BLUETOOTH	200 MA	30 - 40 V	110MM X 40MM X 25MM
12W	BLUETOOTH	300 MA	30 - 40 V	110MM X 40MM X 25MM
20W	BLUETOOTH	500 MA	30 - 40 V	140MM X 42MM X 27MM

SMPS

DIMMABLE / NON DIMMABLE

- C V IP₂₀ POWER SUPPLY



CONSTANT VOLTAGE - NON DIMMABLE

PRODUCT SPECIFICATION

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
60W	12V	5A	IP 20	170 X 35 X 23MM
60W	24V	2.5A	IP 20	170 X 35 X 23MM
100W	12V	8.3A	IP 20	145 X 48 X 29MM
100W	24V	4A	IP 20	145 X 48 X 29MM
150W	12V	12.5A	IP 20	195 X 48 X 29MM
150W	24V	6.25A	IP 20	195 X 48 X 29MM
200W	12V	16.7A	IP 20	195 X 48 X 29MM
200W	24V	8.3A	IP 20	195 X 48 X 29MM
250W	12V	21A	IP 20	258 X 48 X 29MM
250W	24V	10.5A	IP 20	258 X 48 X 29MM
300W	12V	25A	IP 20	245 X 64 X 29MM
300W	24V	12.5A	IP 20	245 X 64 X 29MM
400W	12V	29.2A	IP 20	245 X 64 X 29MM

• C V IP67 POWER SUPPLY



CONSTANT VOLTAGE - NON DIMMABLE

PRODUCT SPECIFICATION



WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
60W	12V	5A	IP 67	180 X 35 X 25MM
60W	24V	2.5A	IP 67	180 X 35 X 25MM
100W	12V	8.3A	IP 67	160 X 43 X 18MM
100W	24V	4A	IP 67	160 X 43 X 18MM
150W	12V	12.5A	IP 67	180 X 58 X 32MM
150W	24V	6.25A	IP 67	180 X 58 X 32MM
200W	12V	16.7A	IP 67	210 X 58 X 32MM
200W	24V	8.3A	IP 67	210 X 58 X 32MM
250W	12V	21A	IP 67	200 X 72 X 31MM
250W	24V	10.5A	IP 67	200 X 48 X 29MM
300W	12V	25A	IP 67	230 X 74 X 31MM
300W	24V	12.5A	IP 67	230 X 74 X 31MM

- C V DIMMABLE POWER SUPPLY



CONSTANT VOLTAGE - DIMMABLE

PRODUCT SPECIFICATION - 3 IN 1 (TRIAC / I - 10 V / PWM)

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
75W	12V	6.25A	IP 20	145 X 48X 29MM
75W	24V	3A	IP 20	145 X 35 X 29MM
100W	12V	8.3A	IP 20	160 X 48 X 29MM
100W	24V	4A	IP 20	160 X 48 X 29MM
150W	12V	12.5A	IP 20	195 X 48 X 29MM
150W	24V	6.25A	IP 20	195 X 48 X 29MM
200W	12V	16.7A	IP 20	195 X 48 X 29MM
200W	24V	8.3A	IP 20	195 X 48 X 29MM

- DALI DT6 DIMMABLE



CONSTANT VOLTAGE - DALI DIMMABLE

PRODUCT SPECIFICATION

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
75W	12V	6.25A	IP 20	140 X 55 X 30MM
75W	24V	3A	IP 20	140 X 55 X 30MM
100W	12V	8.3A	IP 20	195 X 55 X 30MM
100W	24V	4A	IP 20	195 X 55 X 30MM
150W	12V	12.5A	IP 20	195 X 55 X 30MM
150W	24V	6.25A	IP 20	195 X 55 X 30MM
200W	12V	16.7A	IP 20	195 X 55 X 30MM
200W	24V	8.3A	IP 20	195 X 55 X 30MM

- DALI DT8 DIMMABLE



CONSTANT VOLTAGE - DALI DIMMABLE

PRODUCT SPECIFICATION

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
100W	24V	4A	IP 20	160 X 48 X 29MM
200W	24V	8.3A	IP 20	195 X 48 X 29MM

- C V 48V DIMMABLE POWER SUPPLY



CONSTANT VOLTAGE - DIMMABLE

PRODUCT SPECIFICATION - 3 IN 1 (TRIAC / 1 - 10 V / PWM)

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
75W	48V	1.5A	IP 20	195 X 55 X 30MM
100W	48V	2A	IP 20	195 X 55 X 30MM
150W	48V	3.1A	IP 20	195 X 55 X 30MM
200W	48V	4.1A	IP 20	195 X 55 X 30MM


- 48V DALI DIMMABLE



CONSTANT VOLTAGE - DALI DIMMABLE

PRODUCT SPECIFICATION

WATTS	VOLTAGE	CURRENT	IP RATED	SIZE (L X W X H)
75W	48V	1.5A	IP 20	195 X 55 X 30MM
100W	48V	2.10A	IP 20	195 X 55 X 30MM
150W	48V	3.12A	IP 20	195 X 55 X 30MM
200W	48V	4.16A	IP 20	195 X 55 X 30MM

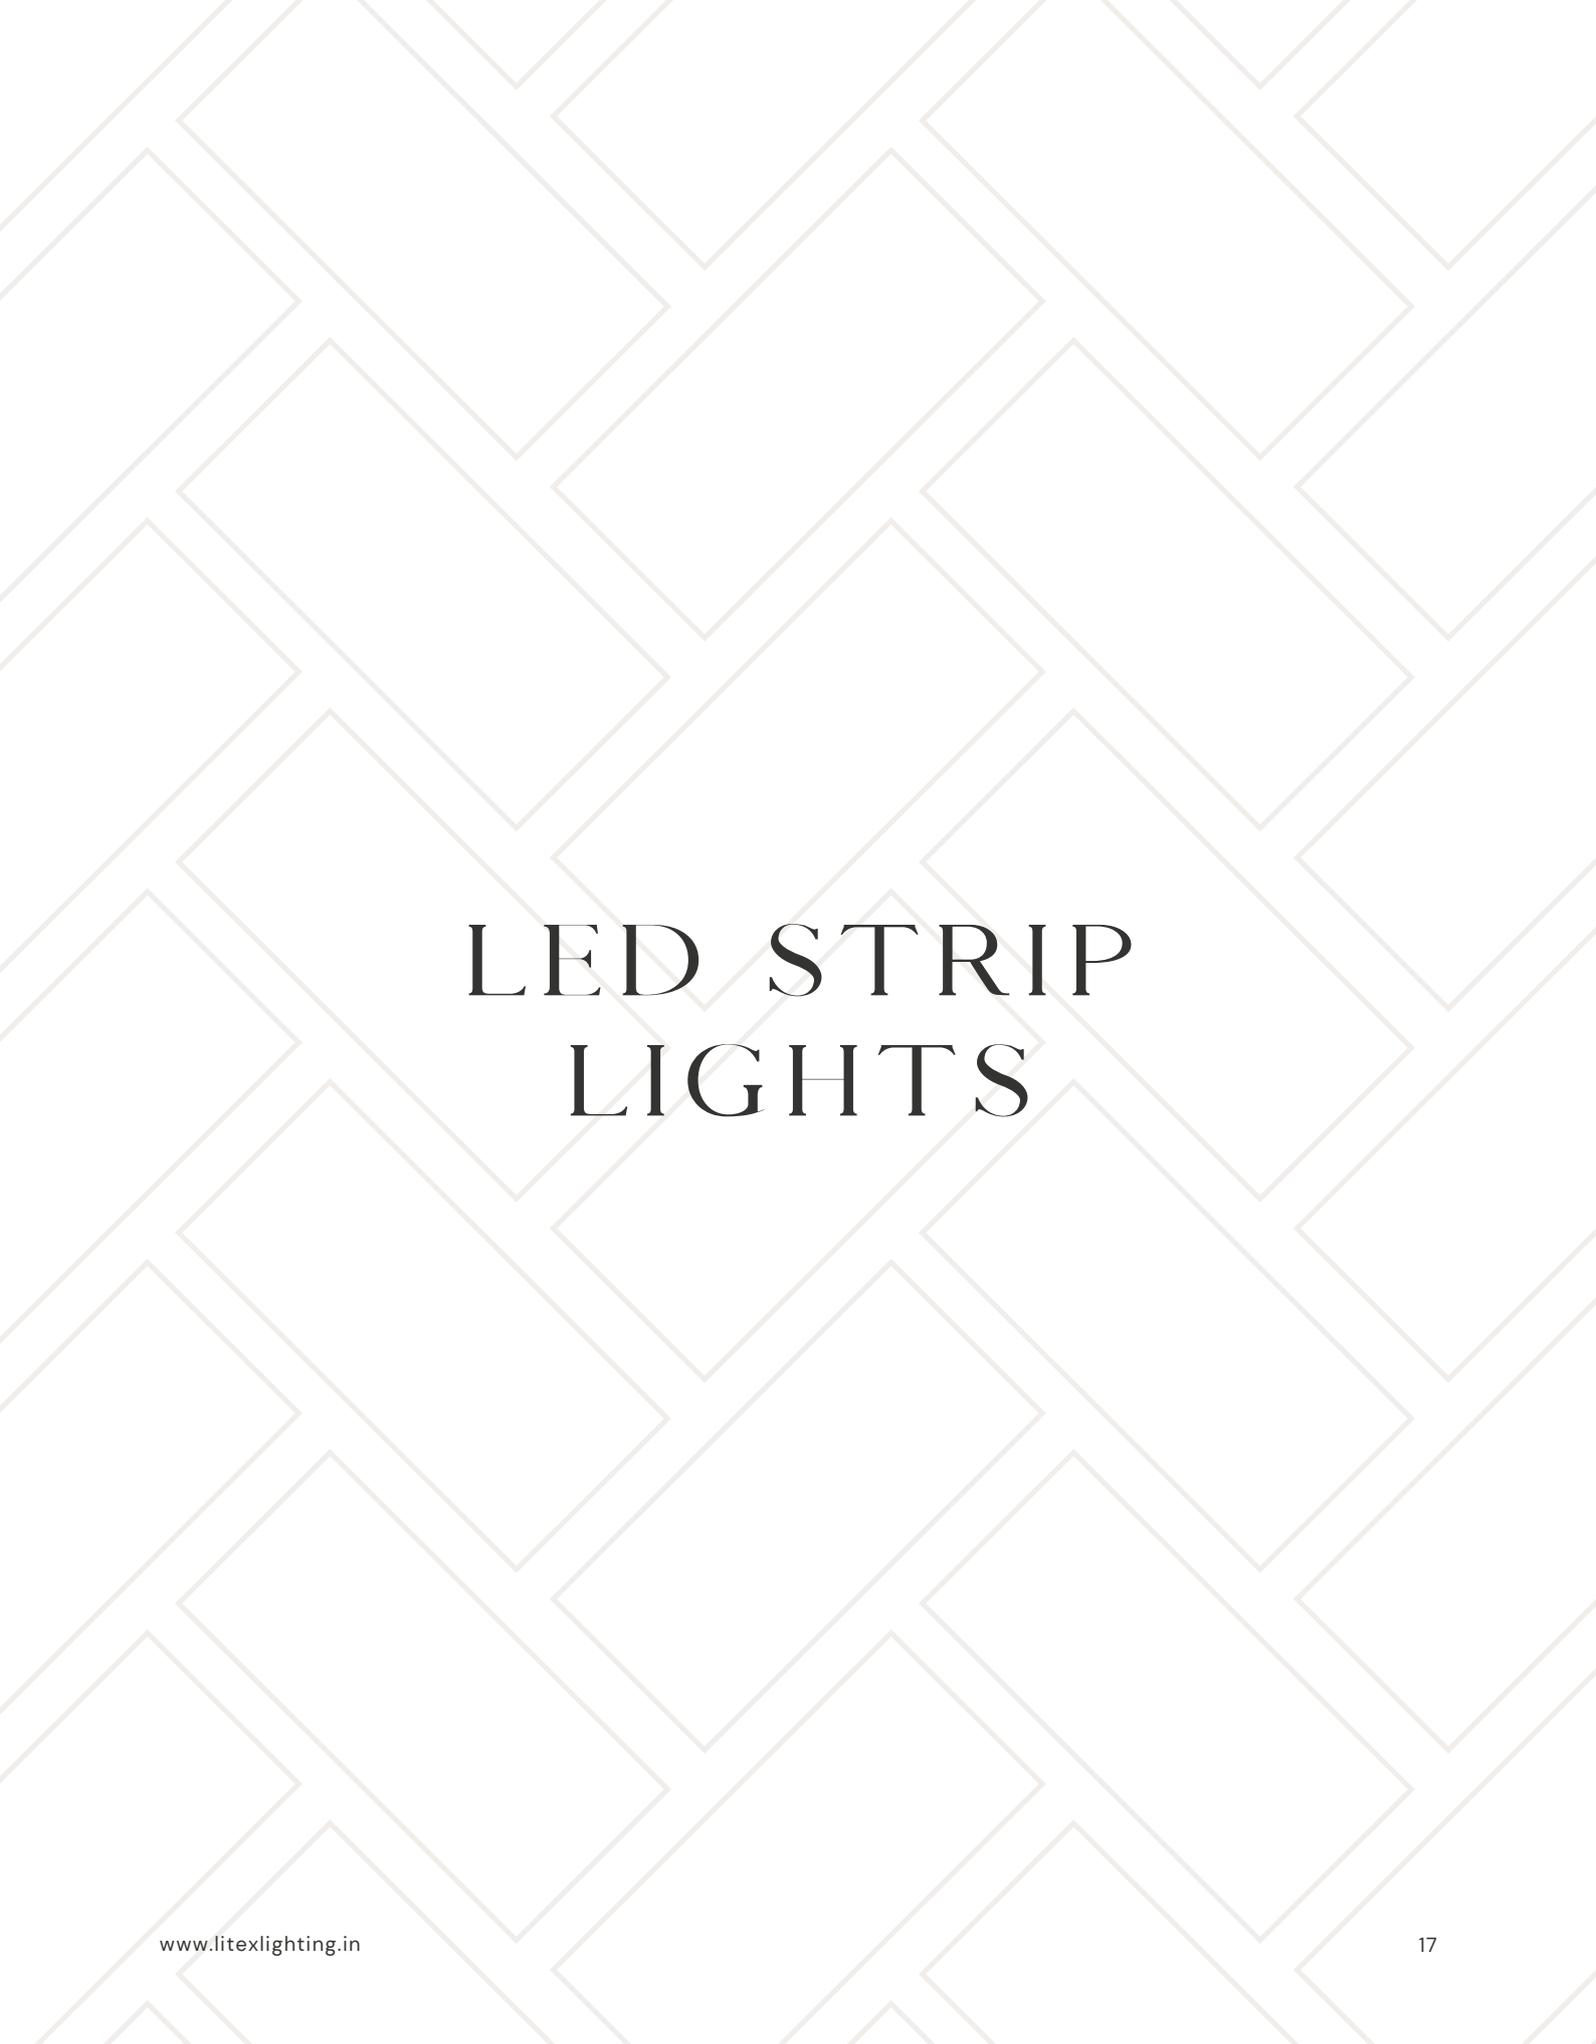

LED STRIP LIGHTS





• LED STRIP LIGHTS



12V 80 CRI LED STRIP

PRODUCT SPECIFICATION

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 120 LED	2700K, NW & WH	12W	12V DC	IP 20	5 MM 30Z	BRIDGELUX	26-28 LM
2835 - 120 LED	BLUE/AMBER/GREEN	12W	12V DC	IP 20	5 MM 30Z	BRIDGELUX	26-28 LM
2835 - 120 LED	2700K, NW & WH	12W	12V DC	IP 20	8 MM 30Z	BRIDGELUX	26-28 LM
2835 - 180 LED	2700K, NW & WH	18W	12V DC	IP 20	10 MM 30Z	BRIDGELUX	26-28 LM
2835 - 240 LED	2700K, NW & WH	24W	12V DC	IP 20	10 MM 30Z	BRIDGELUX	26-28 LM

• LED STRIP LIGHTS



24V 80 CRI LED STRIP

PRODUCT SPECIFICATION

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 120 LED	2700K, NW & WH	12W	24V DC	IP 20	5 MM 30Z	BRIDGELUX	26-28 LM
2835 - 120 LED	2700K, NW & WH	12W	24V DC	IP 20	8 MM 30Z	BRIDGELUX	26-28 LM
2835 - 180 LED	2700K, NW & WH	18W	24V DC	IP 20	10 MM 30Z	BRIDGELUX	26-28 LM
2835 - 240 LED	2700K, NW & WH	24W	24V DC	IP 20	10 MM 30Z	BRIDGELUX	26-28 LM
2835 - 360 LED	WH, NW & WW	36W	24V DC	IP 20	30 MM 30Z	SAN'AN	26-28 LM

- HIGH CRI STRIPS

PRODUCT SPECIFICATION

24V 90 CRI LED STRIP

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2110 - 560 LED	2700K & NW	30W	24V DC	IP 20	10 MM 40Z	SEOUL	7-8 LM
2110 - 700 LED	2700K & NW	36W	24V DC	IP 20	12 MM 40Z	SEOUL	7-8 LM

- DROPLESS STRIP

PRODUCT SPECIFICATION

24V 90 CRI DROPLESS LED STRIP (20 METERS)

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 120 LED	2700K & NW	14 W	24V DC	IP 20	10 MM 50Z	SAN'AN	26-28 LM

- CCT LED STRIPS



CCT LED STRIP

PRODUCT SPECIFICATION

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 180 LED	2700K TO 6500K	18W	12V DC	IP 20	10 MM 3OZ	BRIDGELUX	26-28 LM
2835 - 192 LED	2700K TO 6500K	20W	24V DC	IP 20	10 MM 3OZ	BRIDGELUX	26-28 LM

• 12V WATERPROOF LED STRIPS



PRODUCT SPECIFICATION

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 120 LED	2700K & NW	12W	12V DC	IP 65	5 MM 3OZ	BRIDGELUX	26-28 LM
2835 - 120 LED	2700K & NW	12W	12V DC	IP 65	8 MM 3OZ	BRIDGELUX	26-28 LM
2835 - 180 LED	2700K & NW	18W	12V DC	IP 65	10 MM 3OZ	BRIDGELUX	26-28 LM

• 24V WATERPROOF LED STRIPS



PRODUCT SPECIFICATION

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
2835 - 120 LED	2700K & NW	12W	24V DC	IP 65	5 MM 3OZ	BRIDGELUX	26-28 LM
2835 - 120 LED	2700K & NW	12W	24V DC	IP 65	8 MM 3OZ	BRIDGELUX	26-28 LM
2835 - 180 LED	2700K & NW	18W	24V DC	IP 65	10 MM 3OZ	BRIDGELUX	26-28 LM



- RGB LED STRIP LIGHTS

PRODUCT SPECIFICATION

12V RGB LED STRIP

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
3535 - 144 LED	RGB	20W	12V DC	IP 20	10 MM 30Z	SAN'AN	26-28 LM

- RGB LED STRIP LIGHTS


PRODUCT SPECIFICATION


24V RGB LED STRIP

DESCRIPTION	COLOUR TEMPERATURE	WATTAGE (PER METER)	INPUT VOLTAGE	IP RATING	SIZE (PCB WIDTH)	LED MAKE	LUMINOUS FLUX
5050 - 60 LED	RGB	15W	24V DC	IP 20	10 MM 30Z	SAN'AN	26-28 LM
5050 - 72 LED	RGB + WW	15W	24V DC	IP 20	10 MM 30Z	SAN'AN	26-28 LM
5050 - 72 LED	RGB + WH + WW	15W	24V DC	IP 20	10 MM 30Z	SAN'AN	26-28 LM




NEO FLEX

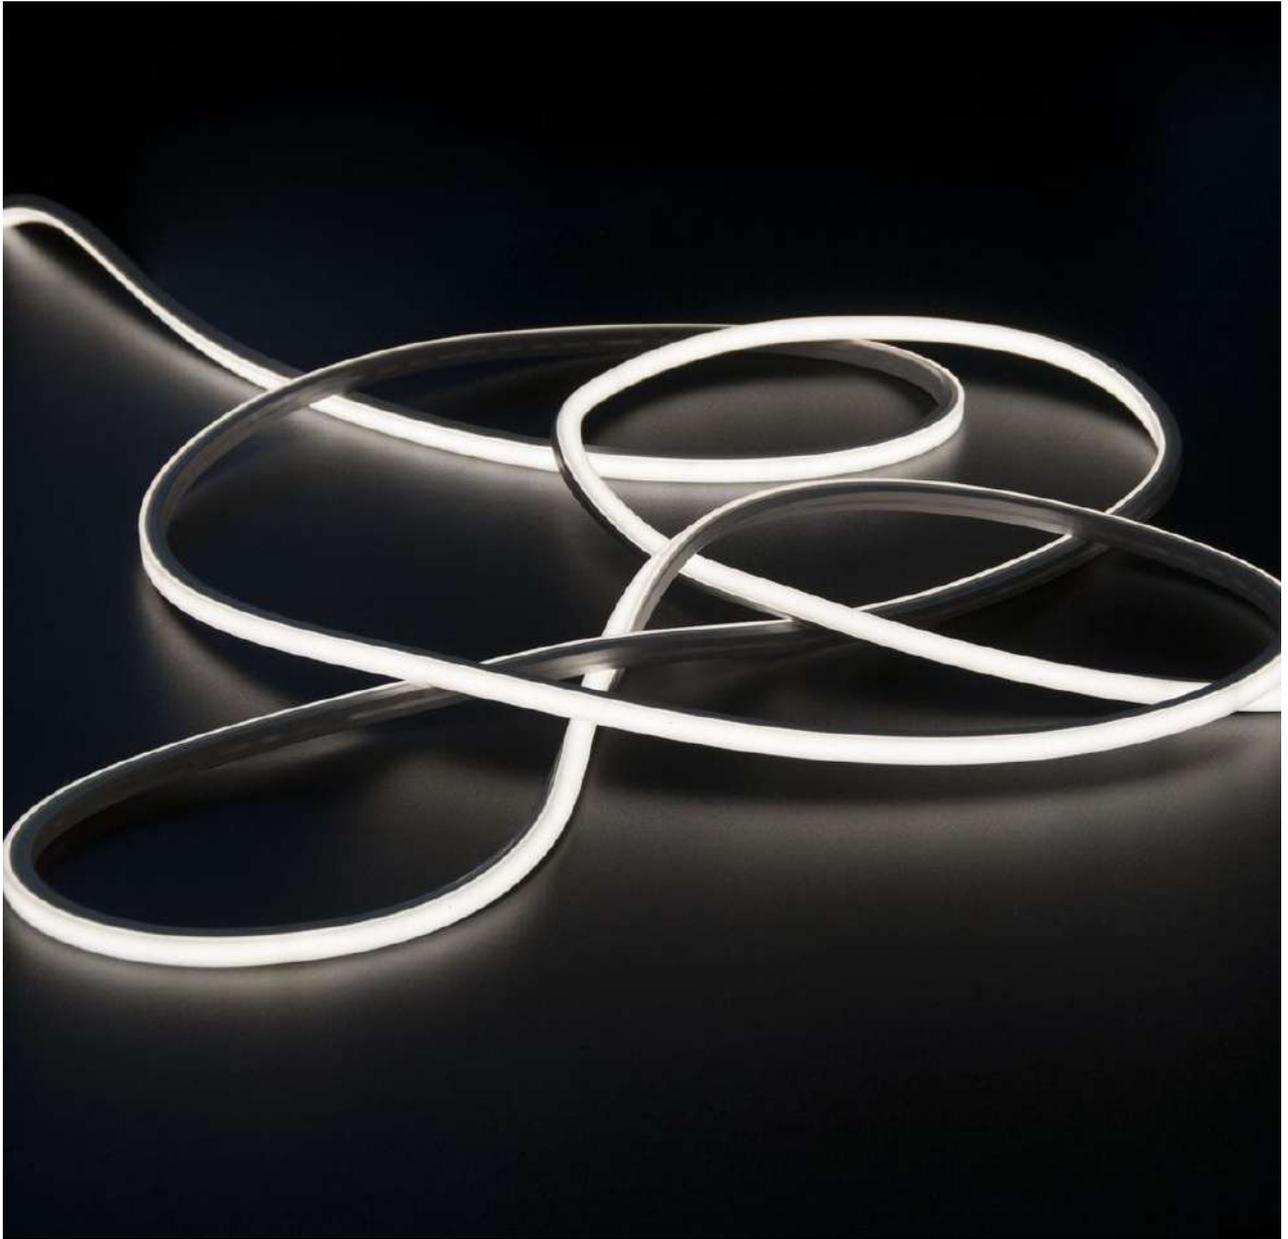

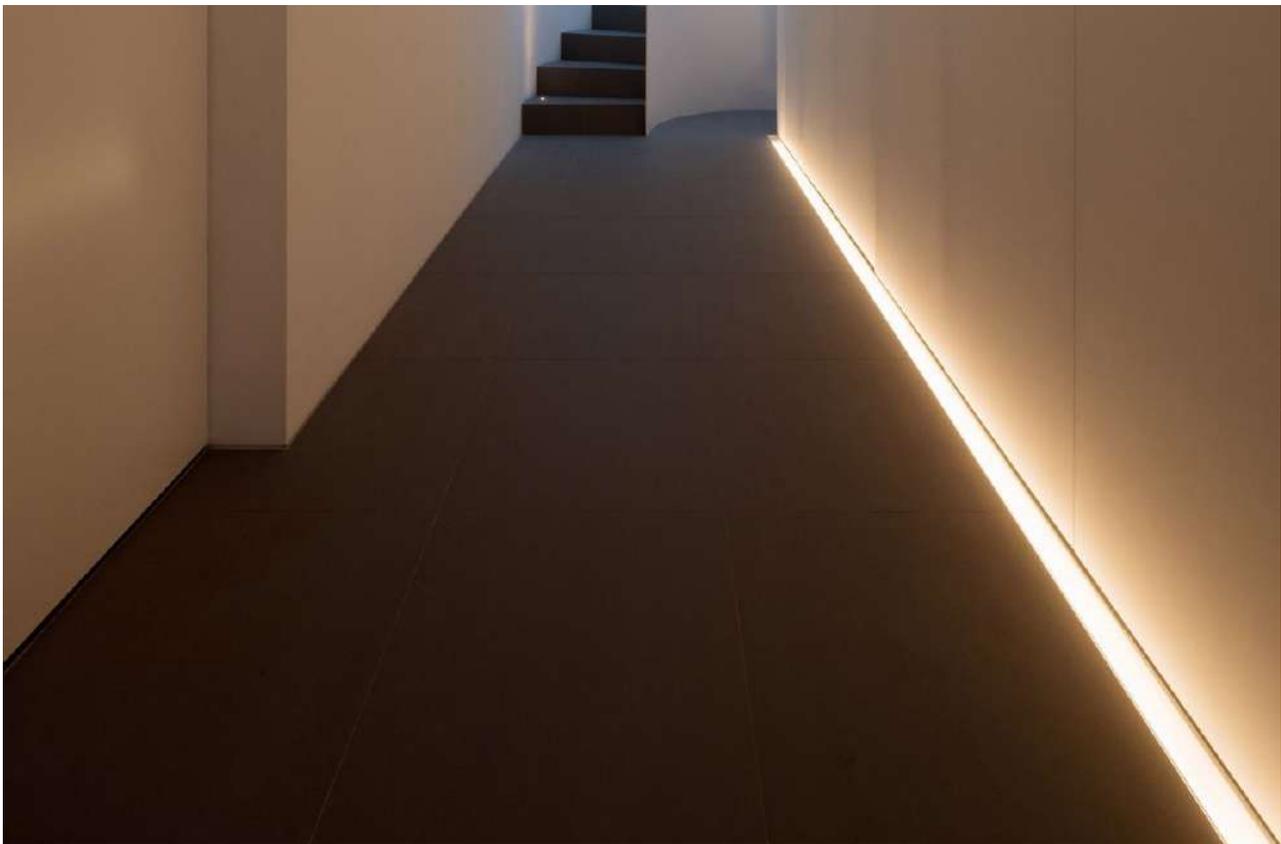

• NEO FLEX

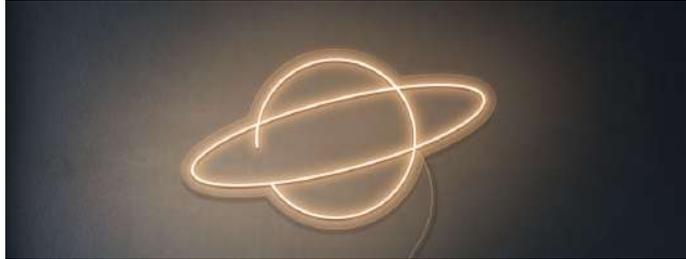

LIVE CAP



END CAP



BACK CLIP

MODEL NO. 04 X 10 (SIDE VIEW)

SIZE : 04 MM X 10 MM
PCB WIDTH : 5 MM
BEAM ANGLE : 120 *



LIVE CAP



END CAP




BACK CLIP

MODEL NO. 06 X 12 (SIDE VIEW)

SIZE : 06 MM X 12 MM
PCB WIDTH : 5 MM
BEAM ANGLE : 120 *



• NEO FLEX

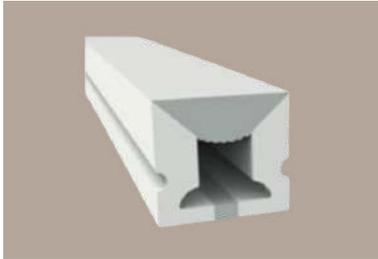

LIVE CAP




END CAP



BACK CLIP

MODEL NO. 10 X 10 (FRONT/TOP VIEW).

SIZE : 10 MM X 10 MM
PCB WIDTH : 5 MM
BEAM ANGLE : 120 *

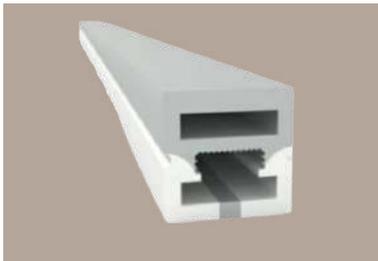

LIVE CAP



END CAP




BACK CLIP

MODEL NO. 12 X 12 (FRONT/TOP VIEW).

SIZE : 12 MM X 12 MM
PCB WIDTH : 8 MM
BEAM ANGLE : 180 *



• NEO FLEX

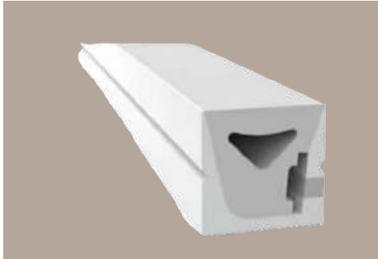

LIVE CAP



END CAP



BACK CLIP

MODEL NO. 12 X 12 (SIDE VIEW)

SIZE : 12 MM X 12 MM
PCB WIDTH : 5 MM
BEAM ANGLE : 120 *



LIVE CAP



END CAP



BACK CLIP

MODEL NO. 12 X 20 (SIDE VIEW)

SIZE : 12 MM X 20 MM
PCB WIDTH : 10 MM
BEAM ANGLE : 120 *



• NEO FLEX



LIVE CAP



END CAP



BACK CLIP

MODEL NO. 13 X 15 (SEMI-CIRCLE)

SIZE : 13 MM X 15 MM
PCB WIDTH : 10 MM
BEAM ANGLE : 180 *



LIVE CAP



END CAP




BACK CLIP

MODEL NO. 16 X 16 (FRONT/TOP VIEW)

SIZE : 16 MM X 16 MM
PCB WIDTH : 10 MM
BEAM ANGLE : 120 *



• NEO FLEX

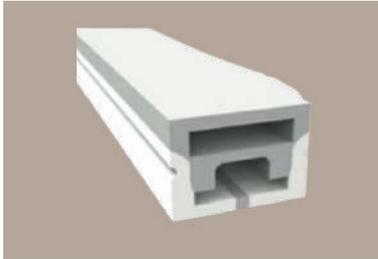

LIVE CAP



END CAP



BACK CLIP

MODEL NO. 20 X 14 (FRONT/TOP VIEW).

SIZE : 20 MM X 14 MM
PCB WIDTH : 12 MM
BEAM ANGLE : 180 *



LIVE CAP



END CAP




BACK CLIP

MODEL NO. 30 X 20 (FRONT/TOP VIEW).

SIZE : 30 MM X 20 MM
PCB WIDTH : 15 MM
BEAM ANGLE : 120 *



• NEO FLEX

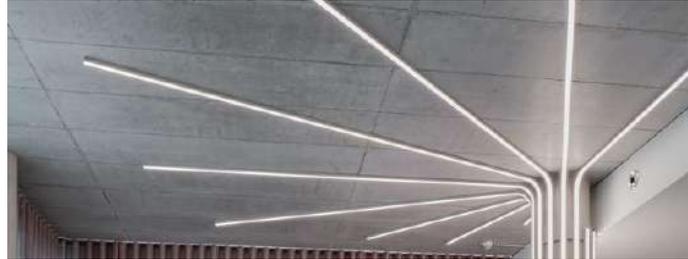

LIVE CAP




END CAP



BACK CLIP

MODEL NO. 50 X 25 (FRONT/TOP VIEW).

SIZE : 50 MM X 25 MM
PCB WIDTH : 20 MM
BEAM ANGLE : 120 *

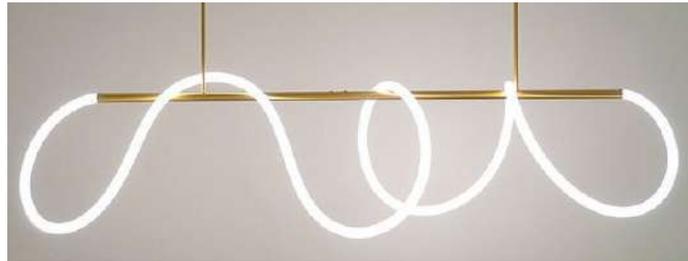

LIVE CAP




END CAP

MODEL NO. D22 - 360* (FULL CIRCLE).

SIZE : 22MM DIAMETER
PCB WIDTH : DOUBLE-SIDED 5MM
BEAM ANGLE : 360 *



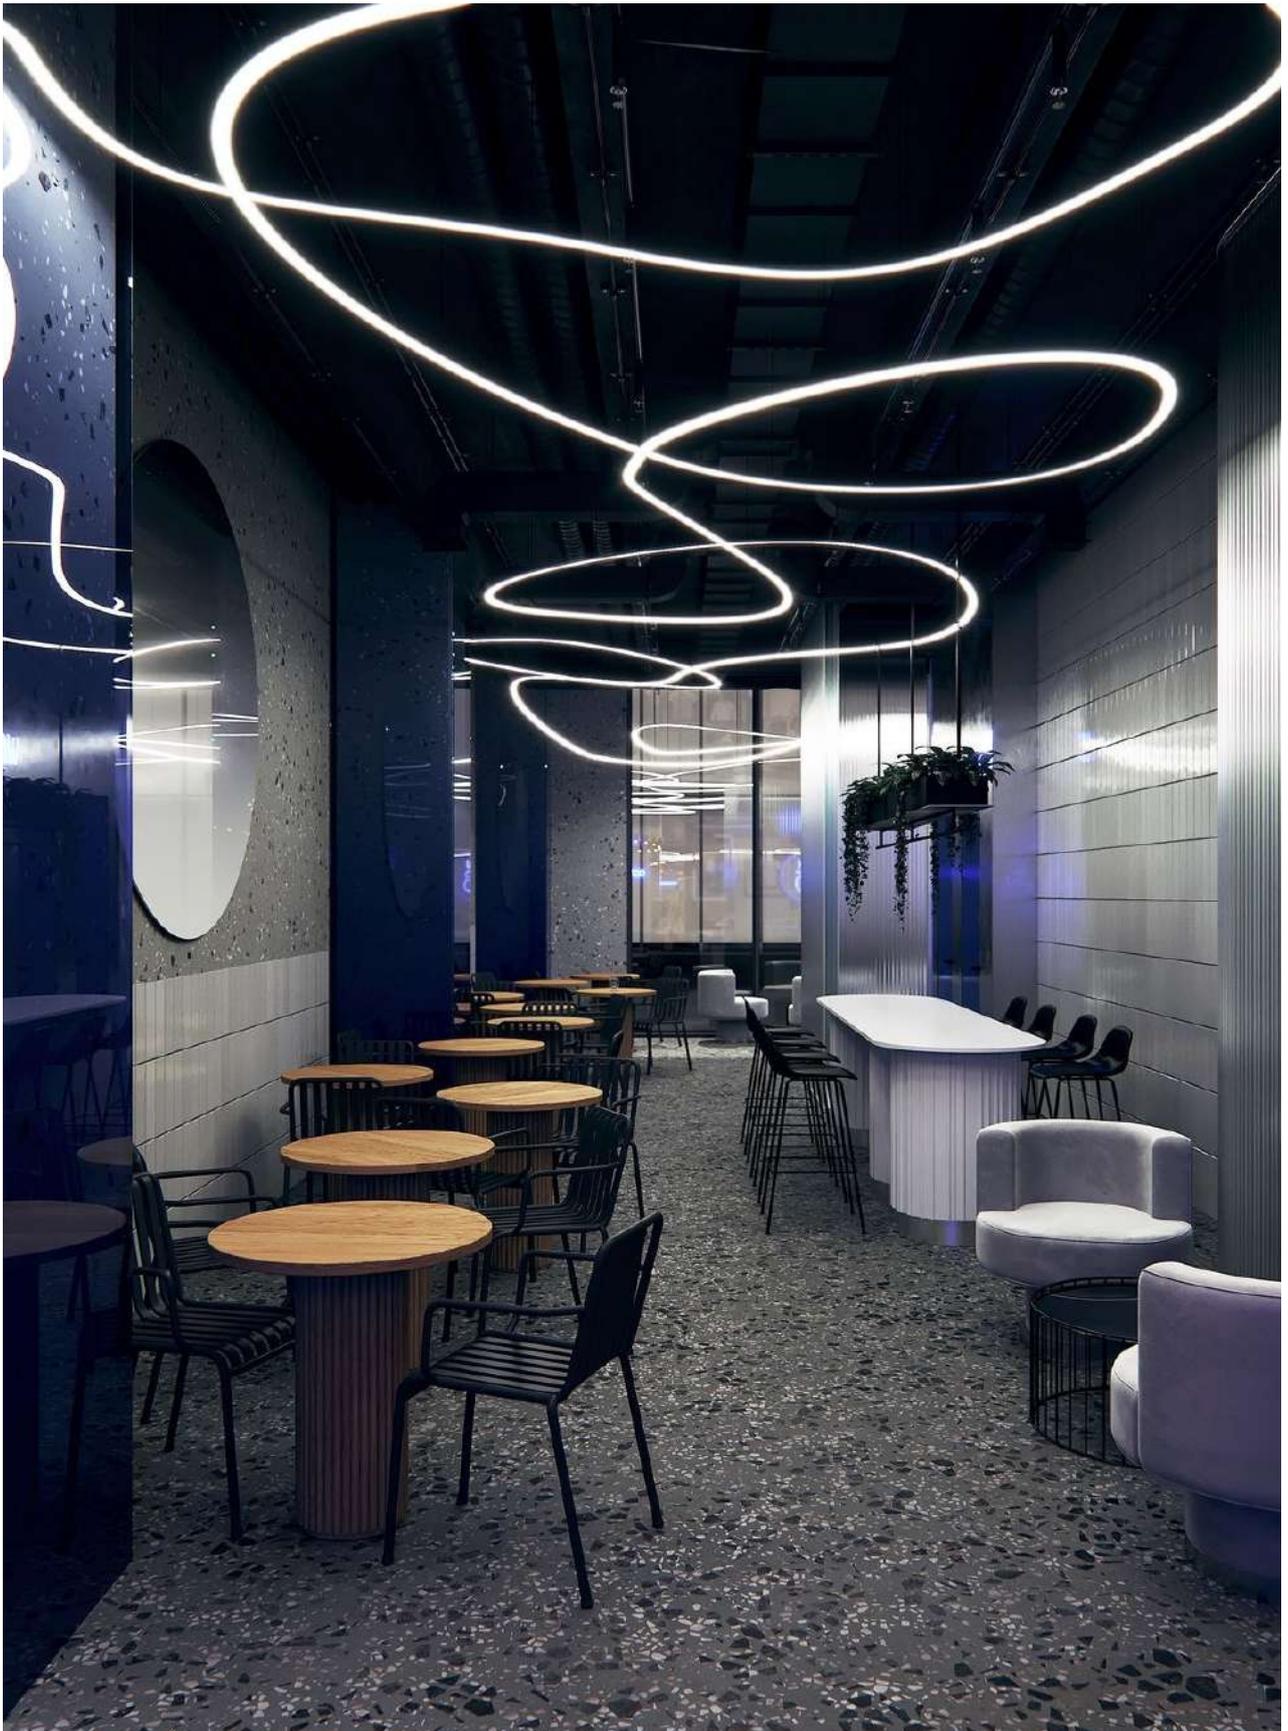




LED NEO FLEX

• LED NEO FLEX



MODEL NO. LED NEO FLEX 06 X 12 (SIDE VIEW)

SIZE : 06 MM X 12 MM
DESCRIPTION : 2835 X 120 LED
VOLTAGE : 24V DC
WATTAGE : 12W PER METER
COLOR TEMPERATURE : 2700K & 4000K
IP RATING : IP67
BEAM ANGLE :120 *

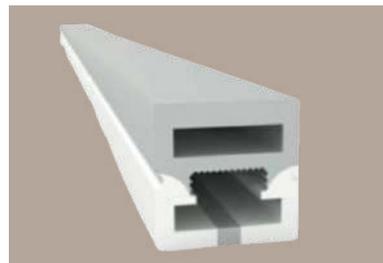

MODEL NO. LED NEO FLEX 12 X 12 (FRONT VIEW)

SIZE : 12 MM X 12 MM
DESCRIPTION : 2835 X 120 LED
VOLTAGE : 24V DC
WATTAGE : 12W PER METER
COLOR TEMPERATURE : 2700K & 4000K
IP RATING : IP67
BEAM ANGLE :180 *





LED WALL GLAZER







• LED WALL GLAZER




PRODUCT SPECIFICATION

MODEL : LINEAR WALL GLAZER


SIZE: 22MM X 12MM
LED : 24 LEDS PER METER | LUMINOUS FLUX : 100 LM
VOLTAGE : 24V DC
WATTAGE : 18W PER METER
BEAM ANGLE : 24 *
COLOR TEMPERATURE : 3000K & 4000K
IP RATING : IP67



CORD CONNECTOR




END CAP



BACK CLIP



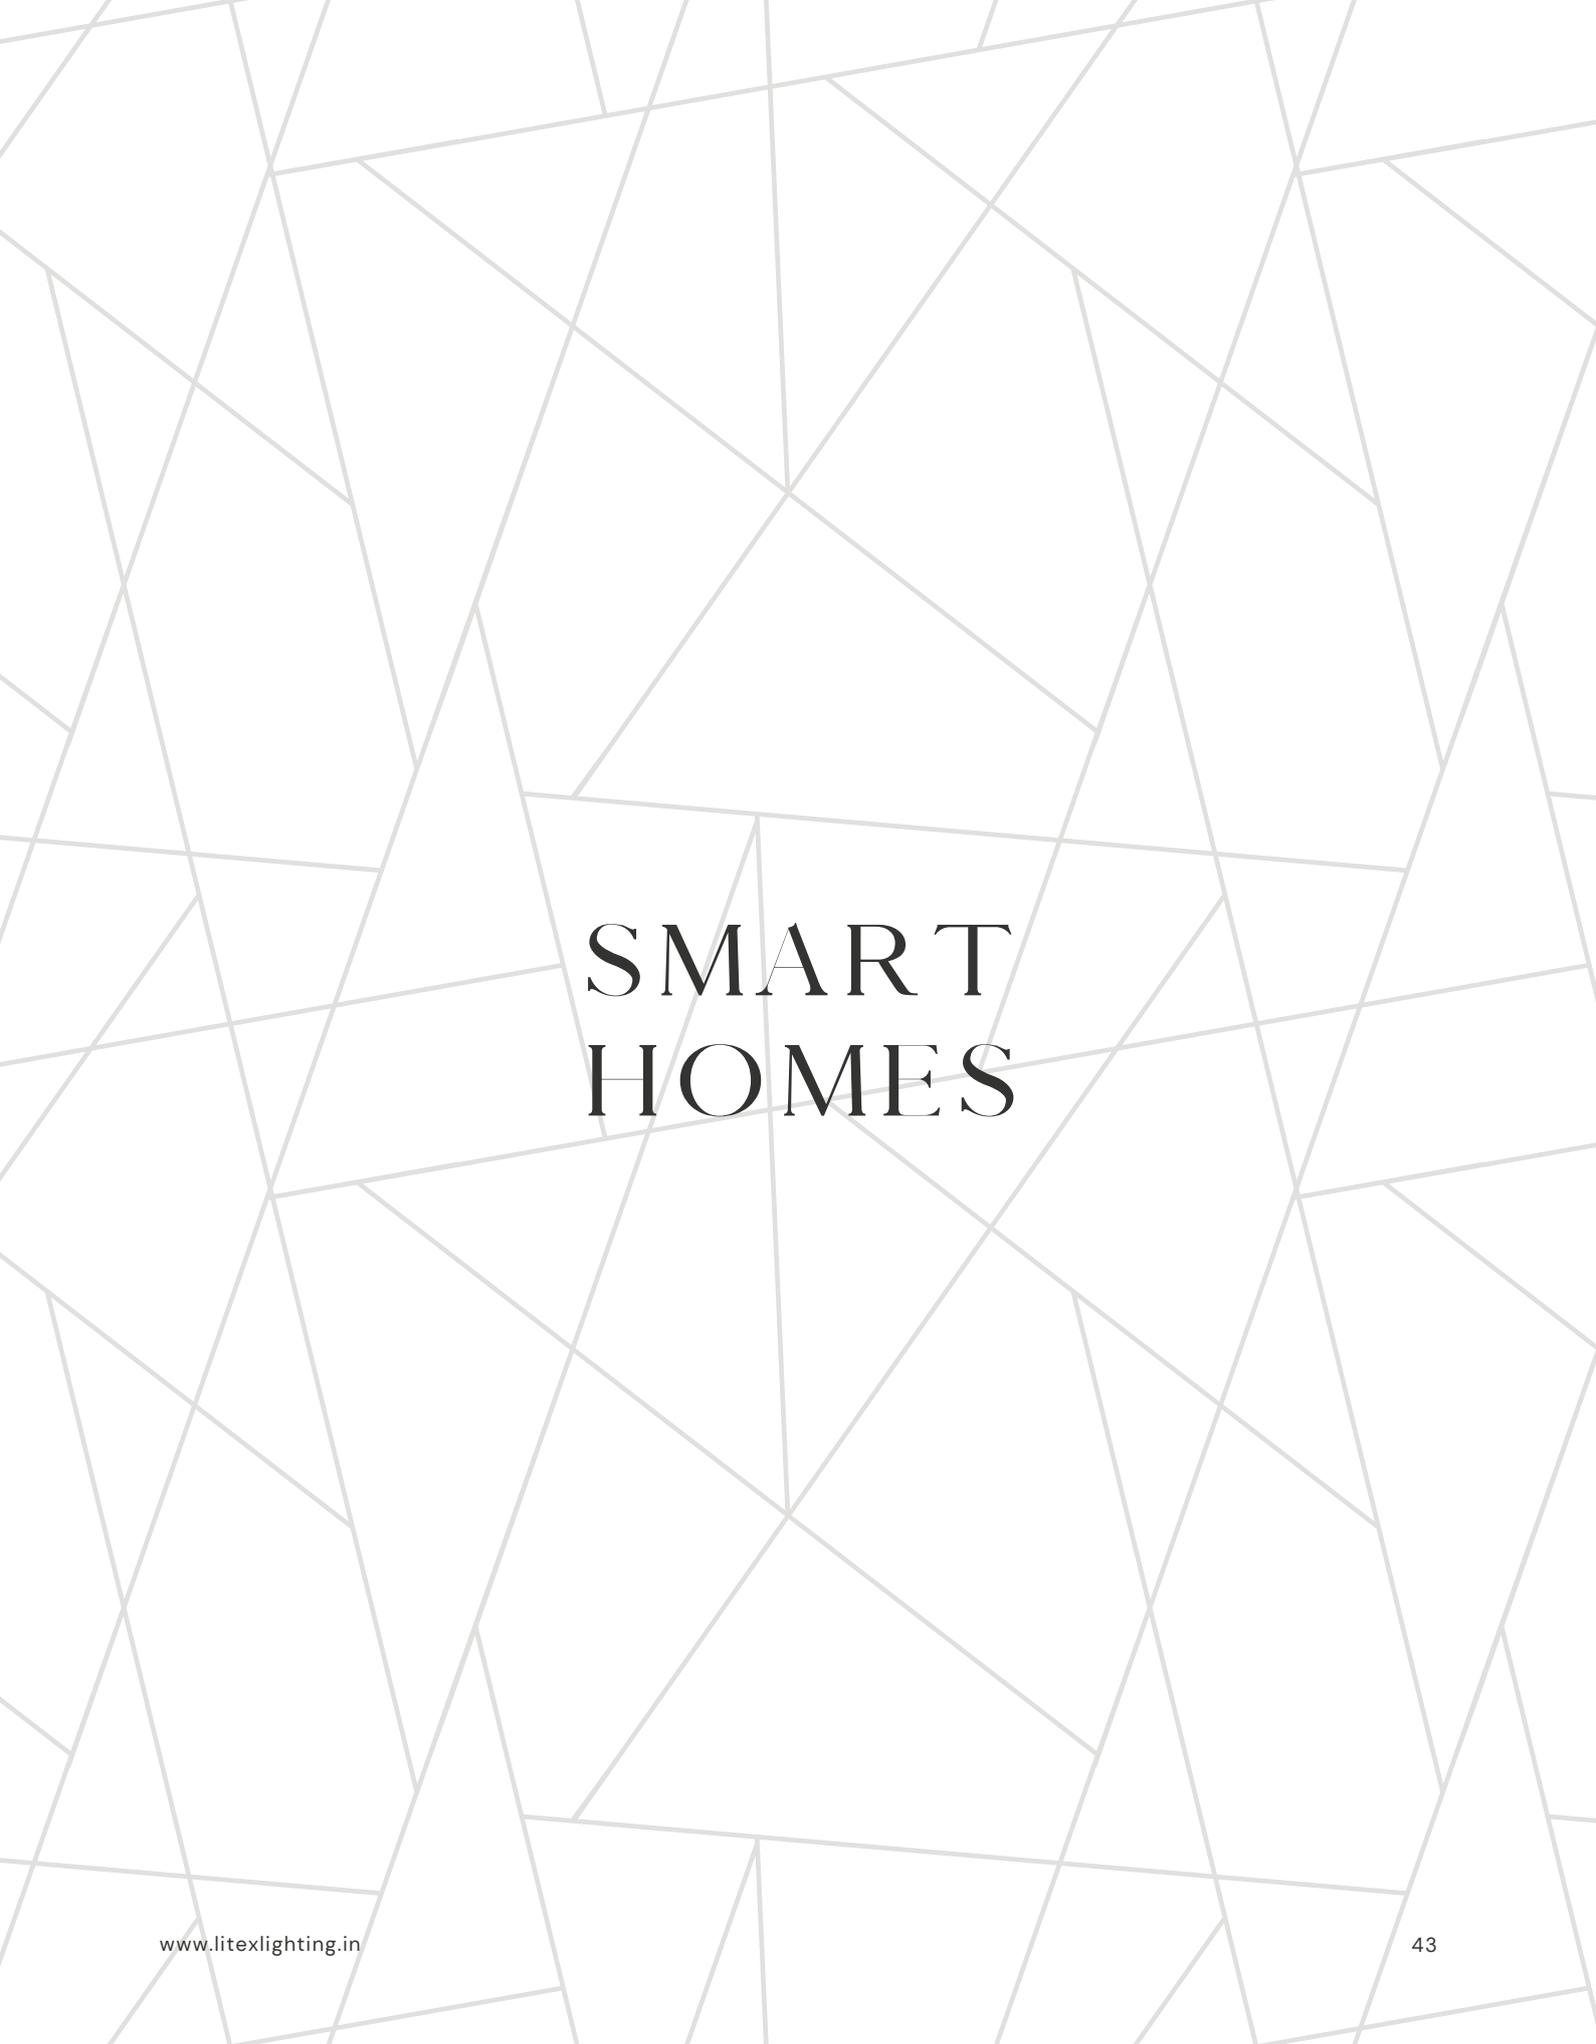

SMART HOMES



3000K ————— 4000K ————— 6000K






0%

50%

100%

• BLUETOOTH LIGHTS

MODEL NO. LT - 706

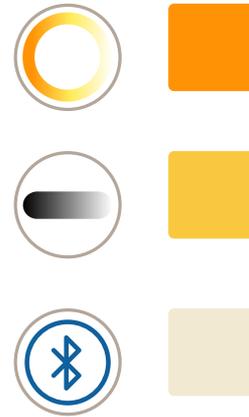


PRODUCT SPECIFICATION

	Wattage	12 W	18 W
Luminous Flux	2700 K	1020 LM	1530 LM
	TO	1080 LM	1620 LM
	6500 K	1140 LM	1710 LM
Dimensions (in MM)	Diameter	59 MM	74 MM
	Cutout	55 MM	70 MM
	Height	82 MM	93 MM
System Specs	Housing	Aluminium	Aluminium
	Driver Brand	Litex Bluetooth	Litex Bluetooth

• BLUETOOTH LIGHTS

MODEL NO. LT - 913

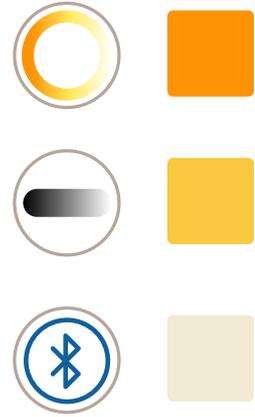

PRODUCT SPECIFICATION

	Wattage	8 W	12 W
Luminous Flux	2700 K	680 LM	1020 LM
	TO	720 LM	1080 LM
	6500 K	760 LM	1140 LM
Dimensions (in MM)	Diameter	75 MM	90 MM
	Cutout	60 MM	70 MM
	Height	65 MM	70 MM
System Specs	Housing	Aluminium	Aluminium
	Driver Brand	Litex Bluetooth	Litex Bluetooth

• BLUETOOTH LIGHTS

MODEL NO. LT - 923



WHITE & BLACK BODY

PRODUCT SPECIFICATION

	Wattage	12W
Luminous Flux	2700 K	1020 LM
	TO	1080 LM
	6500 K	1140 LM
Dimensions (in MM)	Diameter	77 MM
	Cutout	65 MM
	Height	90 MM
System Specs	Housing	Aluminium
	Driver Brand	Litex Bluetooth


• BLUETOOTH LIGHTS



PRODUCT SPECIFICATION

	Wattage	12W	18W
Luminous Flux	2700 K	1020 LM	1530 LM
	TO	1080 LM	1620 LM
	6500 K	1140 LM	1710 LM
Dimensions (in MM)	Diameter	97 MM	130 MM
	Cutout	85 MM	110 MM
	Height	71 MM	90 MM
System Specs	Housing	Aluminium	Aluminium
	Driver Brand	Litex Bluetooth	Litex Bluetooth


• BLUETOOTH LIGHTS

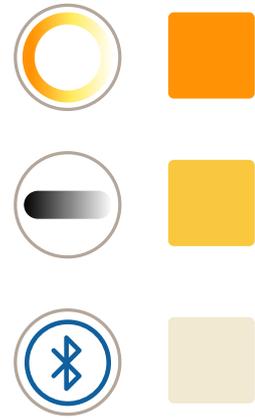

PRODUCT SPECIFICATION - MR-16 LAMP

	Wattage	8 W	12 W
Luminous Flux	2700 K	680 LM	1020 LM
	TO	720 LM	1080 LM
	6500 K	760 LM	1140 LM
Dimensions (in MM)	Diameter	50 MM	50 MM
	Height	65 MM	65 MM
System Specs	Housing	Aluminium	Aluminium
	Driver Brand	Litex Bluetooth	Litex Bluetooth

• BLUETOOTH LIGHTS

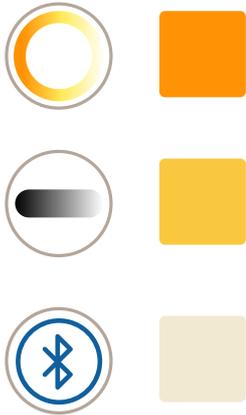

ROUND / SQUARE

PRODUCT SPECIFICATION - SMD DOWNLIGHT

	Wattage	12W
Luminous Flux	2700 K TO 6500 K	1020 LM 1080 LM 1140 LM
Dimensions (in MM)	Diameter Cutout Height	120 MM 100 MM 30 MM
System Specs	Housing Driver Brand	Aluminium Litex Bluetooth

• BLUETOOTH LIGHTS

MODEL NO. LT - 1130



PRODUCT SPECIFICATION

	Wattage	20W
Luminous Flux	2700 K TO 6500 K	1700 LM 1800 LM 1900 LM
System Specs	Finishes Housing Driver Brand	White / Black Aluminium Litex Bluetooth

● APP CONTROL INSTRUCTIONS

SCAN THE GIVEN QR CODE TO DOWNLOAD THE APPLICATION :



IOS DEVICE

SINGLE DEVICE OPERATING :

MENU PAGE

LONG PRESS ON YOUR DEVICE

CONTROL PALETTE

GO TO - COLD-WARM PALETTE

DIMMABLE PALETTE

TUNABLE PALETTE



GROUP OPERATING :

MENU PAGE

CLICK ON - (+) TOP RIGHT CORNER

CLICK ON - 'GROUP 1'

GO TO - MANAGE

CHANGE GROUP NAME & GROUP ICON

GO TO - CURRENT DEVICE (+)

DOUBLE TAP ON YOUR DEVICES TO ADD THEM TO YOUR GROUP

● APP CONTROL INSTRUCTIONS

SCAN THE GIVEN QR CODE TO DOWNLOAD THE APPLICATION :



ANDROID DEVICE

FAMILY FUNCTION :

MENU PAGE

GO TO - SETTINGS (TOP LEFT CORNER)

CLICK ON - CURRENT HOME

GO TO - (+) TOP RIGHT CORNER

CLICK ON - ADD NEW HOME

ENTER NEW HOME NAME & CONFIRM

SWIPE LEFT ON YOUR HOME

CLICK ON - ADD

SYSTEM WILL AUTOMATICALLY ADD DEVICES

PRIVACY TO DEFAULT :

POWER ON FOR 30 SECONDS

POWER OFF FOR 2 MINUTES

POWER ON FOR 1 SECOND

POWER OFF FOR 1 SECOND

POWER ON FOR 1 SECOND

POWER OFF FOR 1 SECOND


POWER ON FOR 5 SECONDS

POWER OFF FOR 1 SECOND

POWER ON - YOU CAN SEE THE DEVICES HAS REACHED A FLASHING STATE AND THEN AUTOMATICALLY RESTARTS, DO NOT POWER OFF DURING THIS FLASHING PROCESS



CABINET LIGHTS

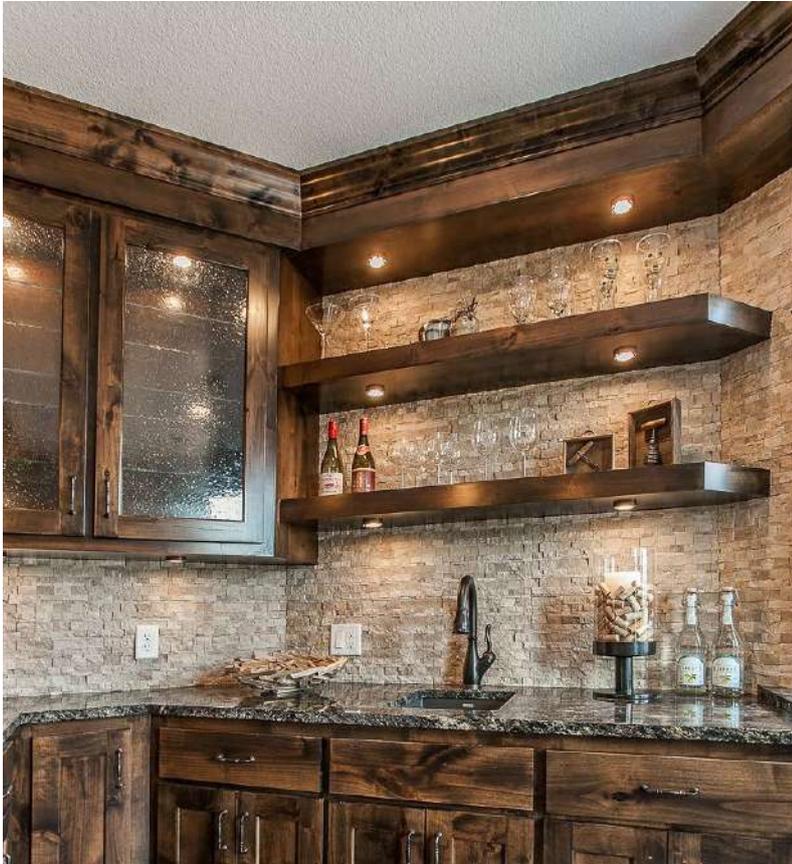



● CABINET LIGHT

MODEL NO. LT - 26901



PRODUCT SPECIFICATION

	Wattage	1W
Luminous Flux	3000 K	138 LM
	4000 K	150 LM
Dimensions (in MM)	Diameter	16 MM
	Cutout	12 MM
	Height	20 MM
System Specs	Finishes	White / Black
	Housing	Aluminium
	LED Make	Nichia
	Driver Brand	Philips

● CABINET LIGHT

MODEL NO. LT - 27001



PRODUCT SPECIFICATION

	Wattage	1W
Luminous Flux	3000 K	138 LM
	4000 K	150 LM
Dimensions (in MM)	Diameter	16 MM
	Cutout	12 MM
	Height	25 MM
System Specs	Finishes	White / Black
	Housing	Aluminium
	LED Make	Nichia
	Driver Brand	Philips

- CABINET LIGHT

MODEL NO. LT - 0259



PRODUCT SPECIFICATION

	Wattage	3 W
Luminous Flux	3000 K	255 LM
	4000 K	270 LM
Dimensions (in MM)	Diameter	35 MM
	Cutout	25 MM
	Height	34 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Litex

● CABINET LIGHT

MODEL NO. LT - 3201



PRODUCT SPECIFICATION

	Wattage	3 W
Luminous Flux	3000 K	255 LM
	4000 K	270 LM
	6500 K	285 LM
Dimensions (in MM)	Diameter	42 MM
	Cutout	40 MM
	Height	30 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Litex

● CABINET LIGHT

MODEL NO. LT - Y180



PRODUCT SPECIFICATION

	Wattage	3W
Luminous Flux	3000 K	255 LM
	4000 K	270 LM
Dimensions (in MM)	Diameter	45 MM
	Cutout	35 MM
	Height	40 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Litex

- CABINET LIGHT

MODEL NO. LT - 0064



PRODUCT SPECIFICATION

	Wattage	5 W
Luminous Flux	3000 K	425 LM
	4000 K	450 LM
Dimensions (in MM)	Diameter	50 MM
	Cutout	40 MM
	Height	40 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Litex

• NARROW DEGREE LIGHT


MODEL NO. LT - 6045



NARROW DEGREE BEAM ANGLE - 3 *

PRODUCT SPECIFICATION

	Wattage	3W
Luminous Flux	3000 K	255 LM
	4000 K	270 LM
Dimensions (in MM)	Diameter	60 MM
	Cutout	55 MM
	Height	35 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Litex

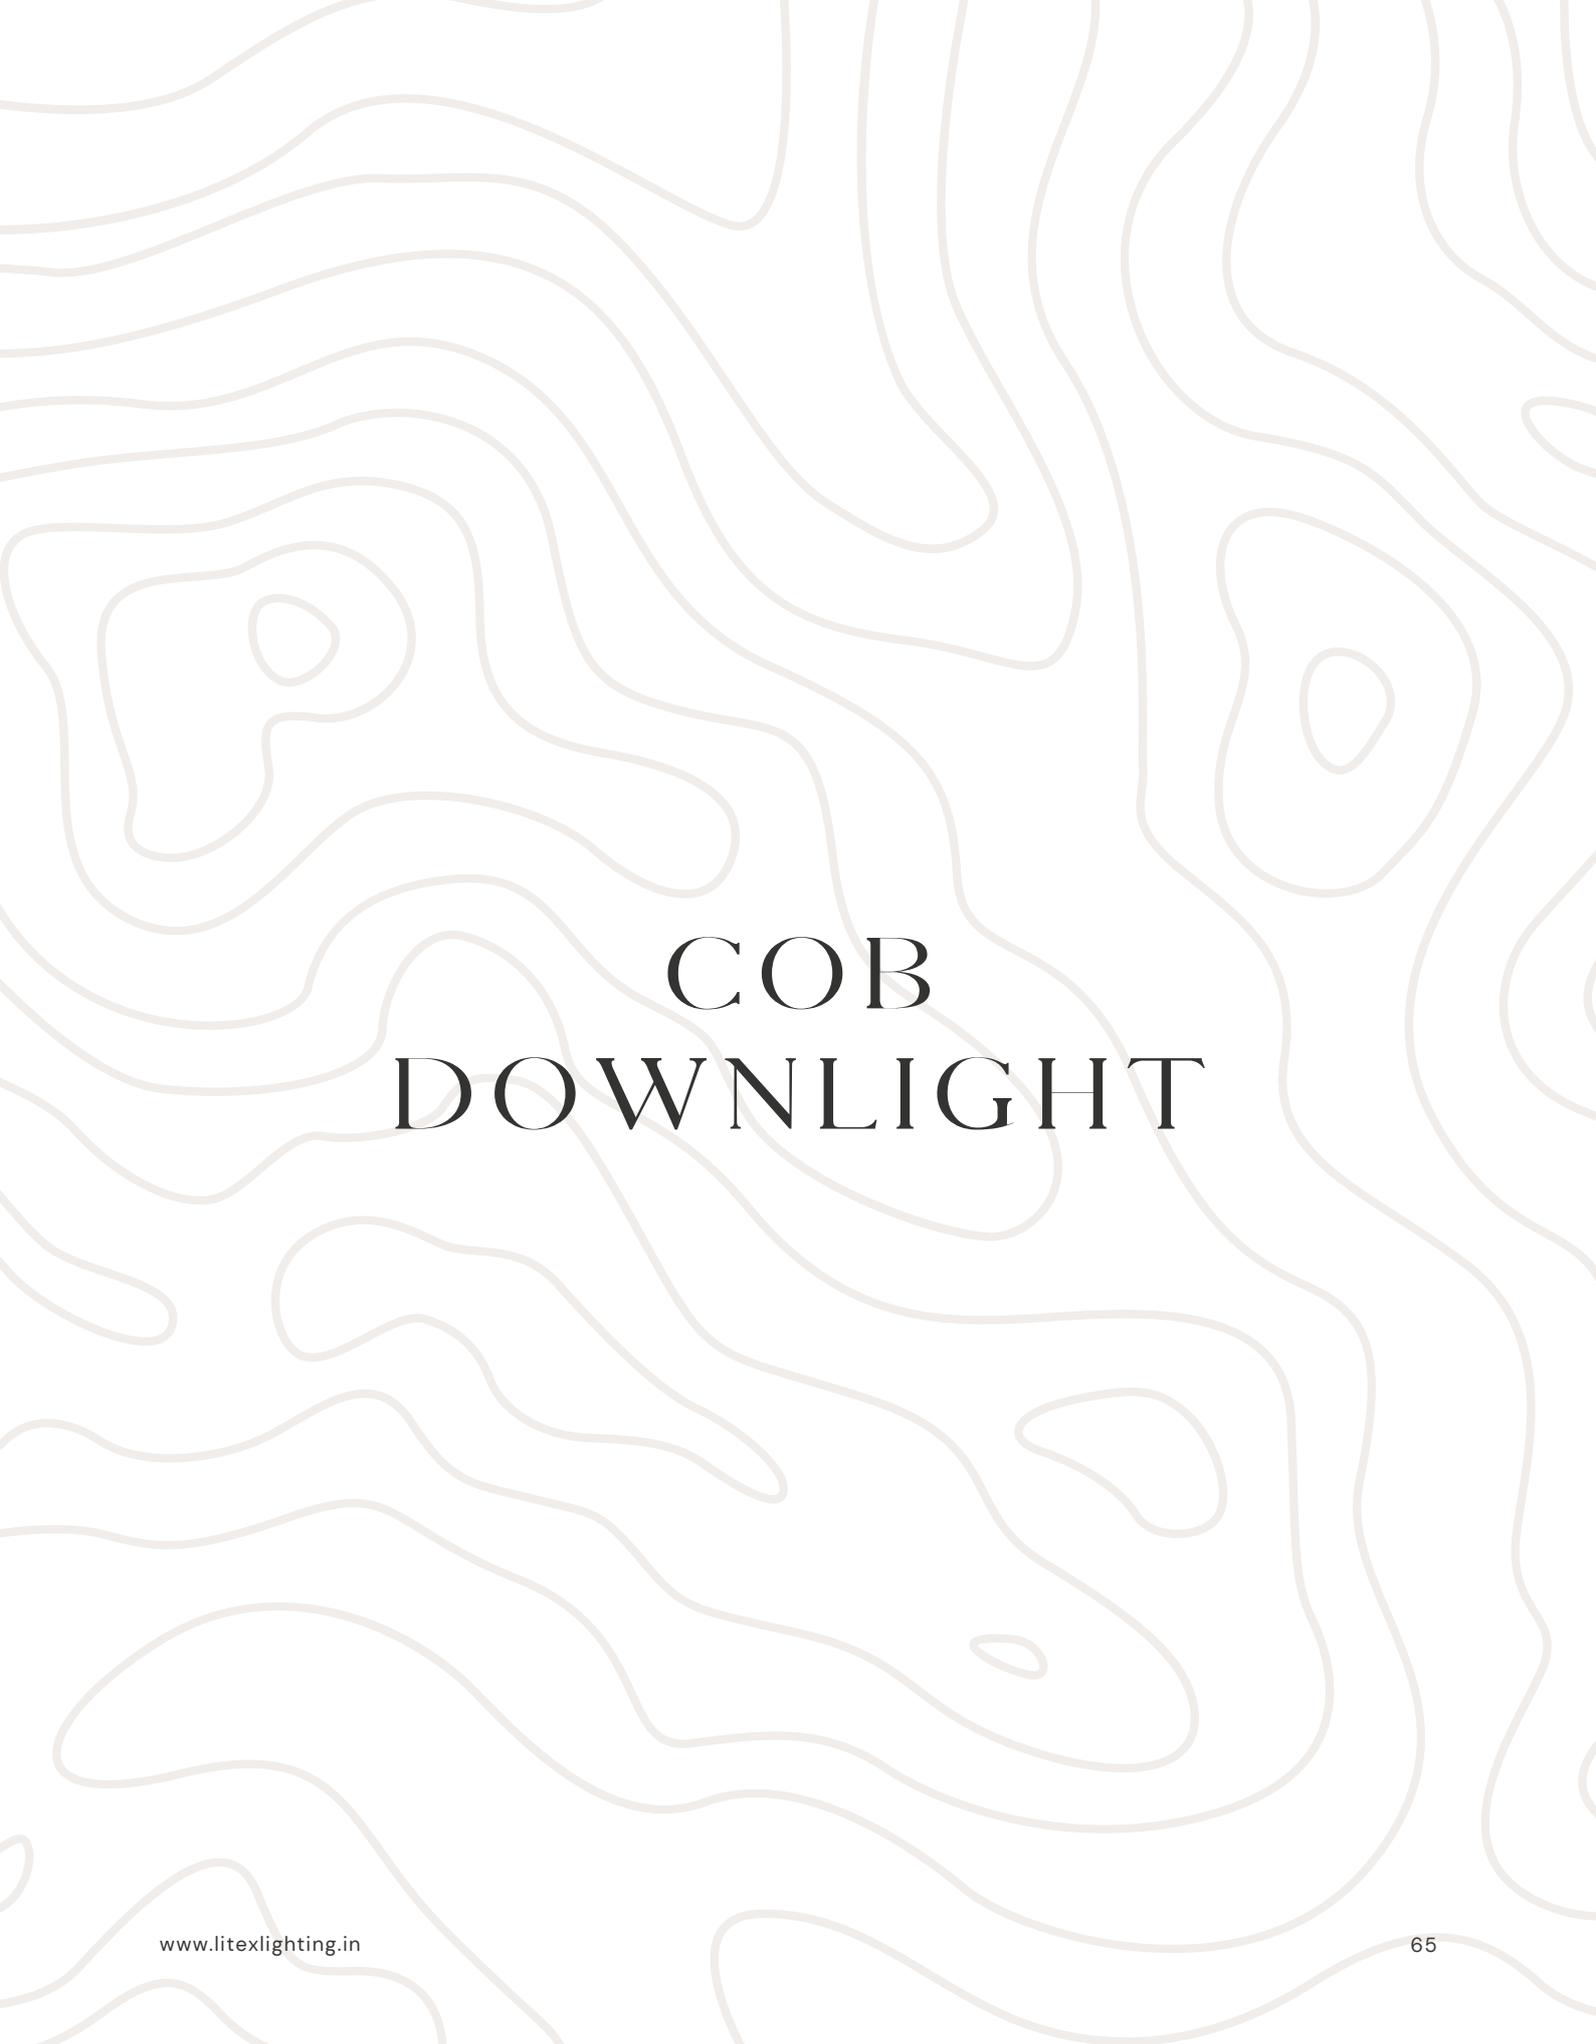

COB DOWNLIGHT





• COB DOWNLIGHT

MODEL NO. LT - 925



PRODUCT SPECIFICATION

	Wattage	3W	8W	12W	18W	30W	40W
Luminous Flux	3000 K	255LM	680 LM	1020 LM	1530 LM	2550 LM	3400 LM
	4000 K	270LM	720 LM	1080 LM	1620 LM	2700 LM	3600 LM
	6500 K	285LM	760 LM	1140 LM	1710 LM	2850 LM	3800 LM
Dimensions (in MM)	Diameter	65 MM	85 MM	110 MM	125 MM	160 MM	140 MM
	Cutout	45 MM	65 MM	90 MM	110 MM	135 MM	130 MM
	Height	35 MM	55 MM	70 MM	75 MM	100 MM	80 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
	LED Make	Bridgelux	Bridgelux	Bridgelux	Bridgelux	Bridgelux	Bridgelux
	Driver Brand	Litex	Philips	Philips	Philips	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - CDCOB - 5




PRODUCT SPECIFICATION

	Wattage	12W	20W	30W
Luminous Flux	3000 K	1020 LM	1700 LM	2550 LM
	4000 K	1080 LM	1800 LM	2700 LM
	6500 K	1140 LM	1900 LM	2850 LM
Dimensions (in MM)	Diameter	110 MM	140 MM	160 MM
	Cutout	85 MM	120 MM	140 MM
	Height	75 MM	90 MM	90 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Cree	Cree	Cree
	Driver Brand	Philips	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - 705

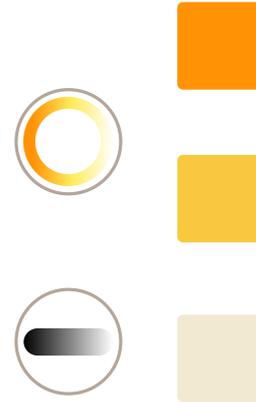

PRODUCT SPECIFICATION

	Wattage	20W	30W
Luminous Flux	3000 K	1700 LM	2550 LM
	4000 K	1800 LM	2700 LM
	6500 K	1900 LM	2850 LM
Dimensions (in MM)	Diameter	130 MM	160 MM
	Cutout	110 MM	140 MM
	Height	90 MM	100 MM
System Specs	Housing	Aluminium	Aluminium
	LED Make	Bridgelux	Bridgelux
	Driver Brand	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - 706



PRODUCT SPECIFICATION

	Wattage	7W	12W	18W
Luminous Flux	3000 K	595 LM	1020 LM	1530 LM
	4000 K	630 LM	1080 LM	1620 LM
	6500 K	665 LM	1140 LM	1710 LM
Dimensions (in MM)	Diameter	45 MM	59 MM	74 MM
	Cutout	35 MM	55 MM	70 MM
	Height	55 MM	82 MM	93 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Cree	Cree	Cree
	Driver Brand	Philips	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - 923




PRODUCT SPECIFICATION

	Wattage	12W
Luminous Flux	3000 K	1020 LM
	4000 K	1080 LM
	6500 K	1140 LM
Dimensions (in MM)	Diameter	77 MM
	Cutout	65 MM
	Height	90 MM
System Specs	Finishes	White/Black
	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Philips

• COB DOWNLIGHT

MODEL NO. LT - 920

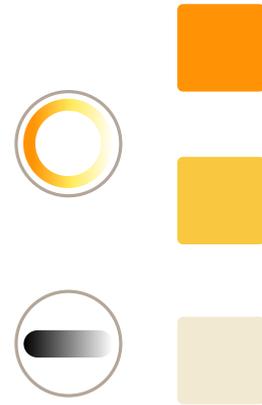

PRODUCT SPECIFICATION

	Wattage	7W	12W
Luminous Flux	3000 K	595 LM	1020 LM
	4000 K	630 LM	1080 LM
	6500 K	665LM	1140 LM
Dimensions (in MM)	Diameter	68 MM	85 MM
	Cutout	55 MM	70 MM
	Height	64 MM	75 MM
System Specs	Housing	Aluminium	Aluminium
	LED Make	Cree	Cree
	Driver Brand	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - 913



PRODUCT SPECIFICATION

	Wattage	7W	12W
Luminous Flux	3000 K	595 LM	1020 LM
	4000 K	630 LM	1080 LM
	6500 K	665 LM	1140 LM
Dimensions (in MM)	Diameter	75 MM	90 MM
	Cutout	60 MM	70 MM
	Height	65 MM	70 MM
System Specs	Housing	Aluminium	Aluminium
	LED Make	Cree	Cree
	Driver Brand	Philips	Philips

• COB DOWNLIGHT

MODEL NO. LT - 904



PRODUCT SPECIFICATION

	Wattage	10W
Luminous Flux	3000 K	850 LM
	4000 K	900 LM
	6500 K	950 LM
Dimensions (in MM)	Diameter	80 MM
	Cutout	60 MM
	Height	60 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Philips





WALL WASHER LIGHTS

• WALL WASHER

MODEL NO. LT - 1881



PRODUCT SPECIFICATION

	Wattage	8 W
Luminous Flux	3000 K	680 LM
Dimensions (in MM)	Diameter	85 MM
	Cutout	65 MM
	Height	75 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Eaglerise


• WALL WASHER

MODEL NO. LT - 1884



PRODUCT SPECIFICATION

	Wattage	8W
Luminous Flux	3000 K	680 LM
Dimensions (in MM)	Diameter	90 X 90 MM
	Cutout	65 X 65 MM
	Height	110 MM
System Specs	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Eaglerise

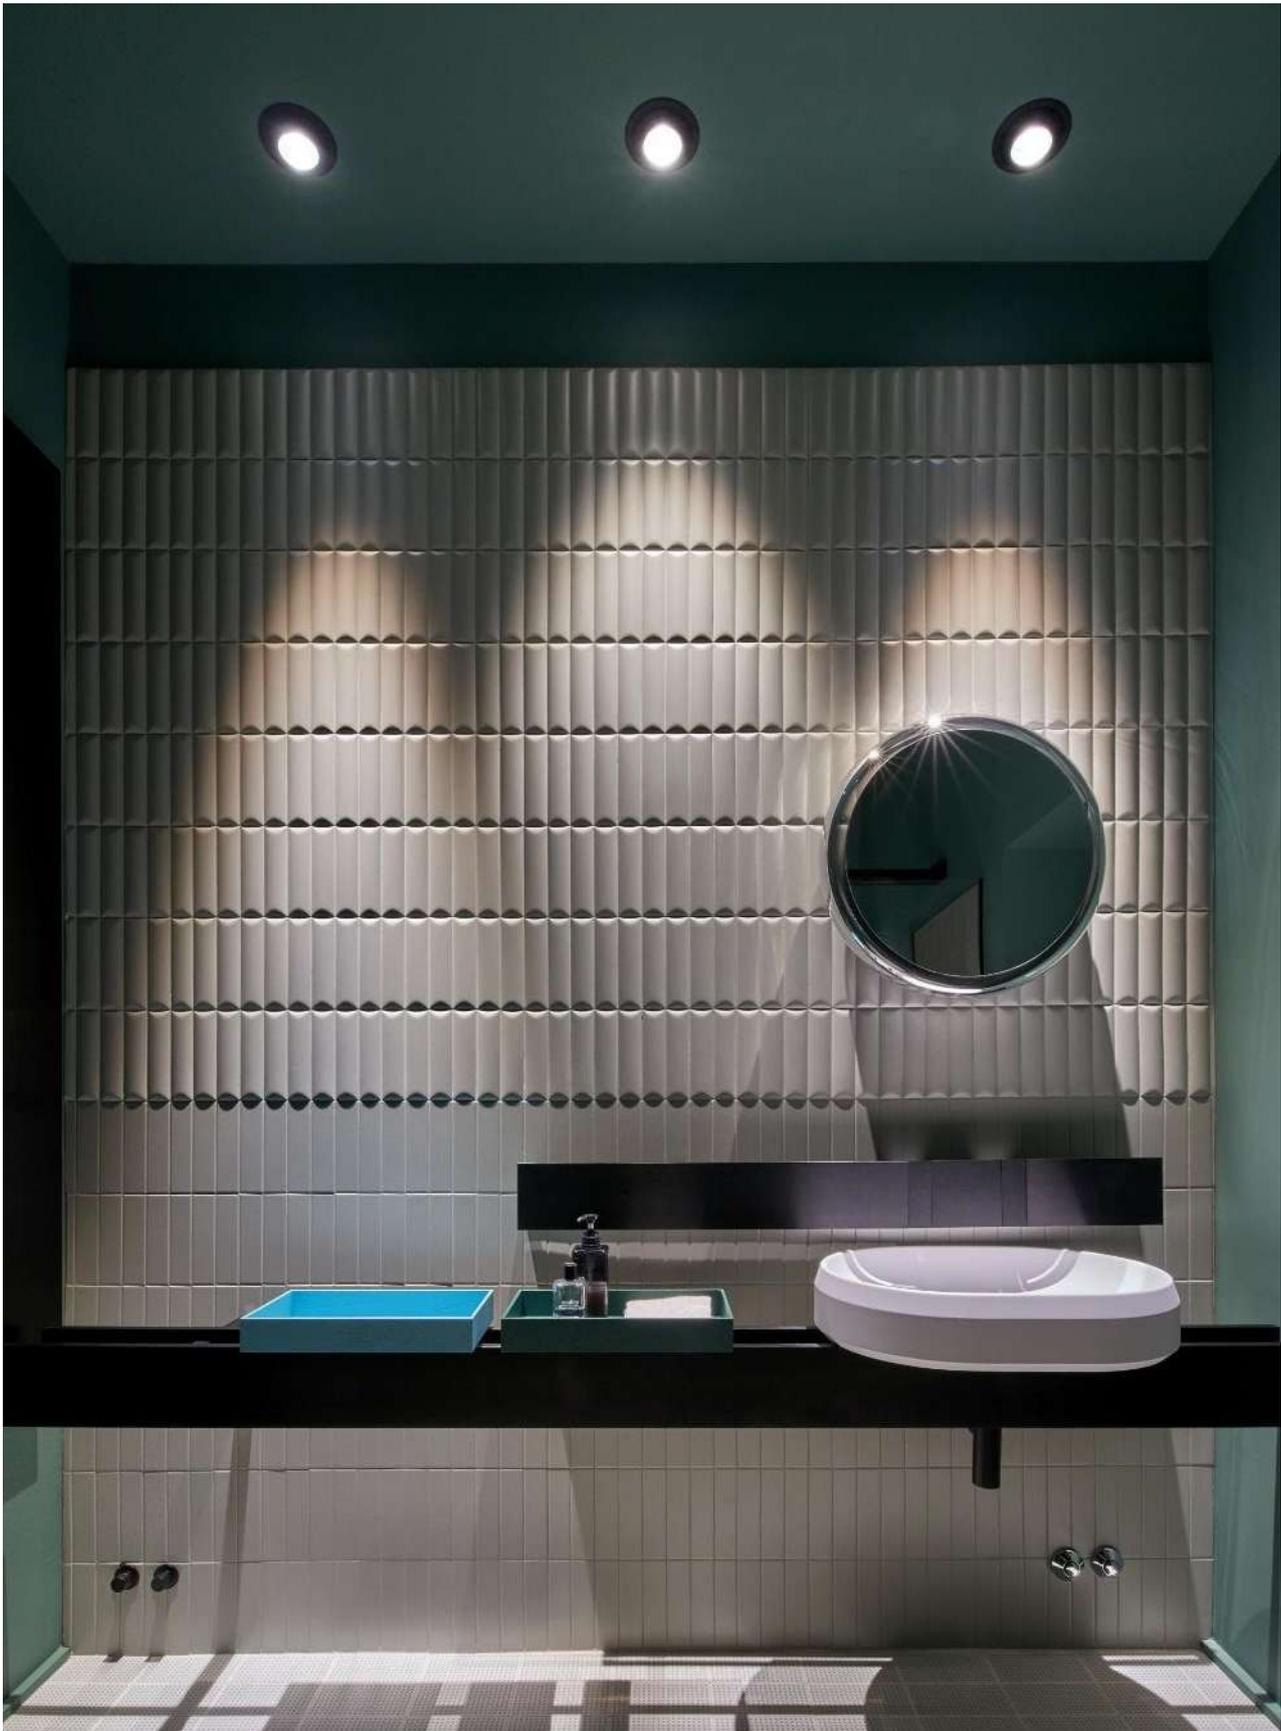



SURFACE LIGHTS





● SURFACE LIGHT

MODEL NO. LT - SD - 07 / 12S



PRODUCT SPECIFICATION

		7W	12S W
Luminous Flux	3000 K	595 LM	1020 LM
	4000 K	630 LM	1080 LM
Dimensions (in MM)	Diameter	60 MM	70 MM
	Height	106 MM	123 MM
System Specs	Finishes	White	White
	Housing	Aluminium	Aluminium
	LED Make	Bridgelux	Bridgelux
	Driver Brand	Litex	Litex

● SURFACE LIGHT

MODEL NO. LT - SD - 06



PRODUCT SPECIFICATION

	Wattage	30W
Luminous Flux	3000 K	2550 LM
	4000 K	2700 LM
	6000 K	2850 LM
Dimensions (in MM)	Diameter	170 MM
	Height	170 MM
System Specs	Housing	Aluminium
	LED Make	Cree
	Driver Brand	Philips

● SURFACE LIGHT

MODEL NO. LT - SD - 16



PRODUCT SPECIFICATION

	Wattage	13 W
Luminous Flux	3000 K	1170 LM
Dimensions (in MM)	Diameter Height	120 MM X 120 MM 100 MM
System Specs	Housing LED Make Driver Brand	Aluminium LG Fortimo SMD DOB

● SURFACE LIGHT


MODEL NO. LT - SD - 07



PRODUCT SPECIFICATION

	Wattage	13 W
Luminous Flux	3000 K	1170 LM
Dimensions (in MM)	Diameter Height	130 MM 120 MM
System Specs	Housing LED Make Driver Brand	Aluminium LG Fortimo SMD DOB



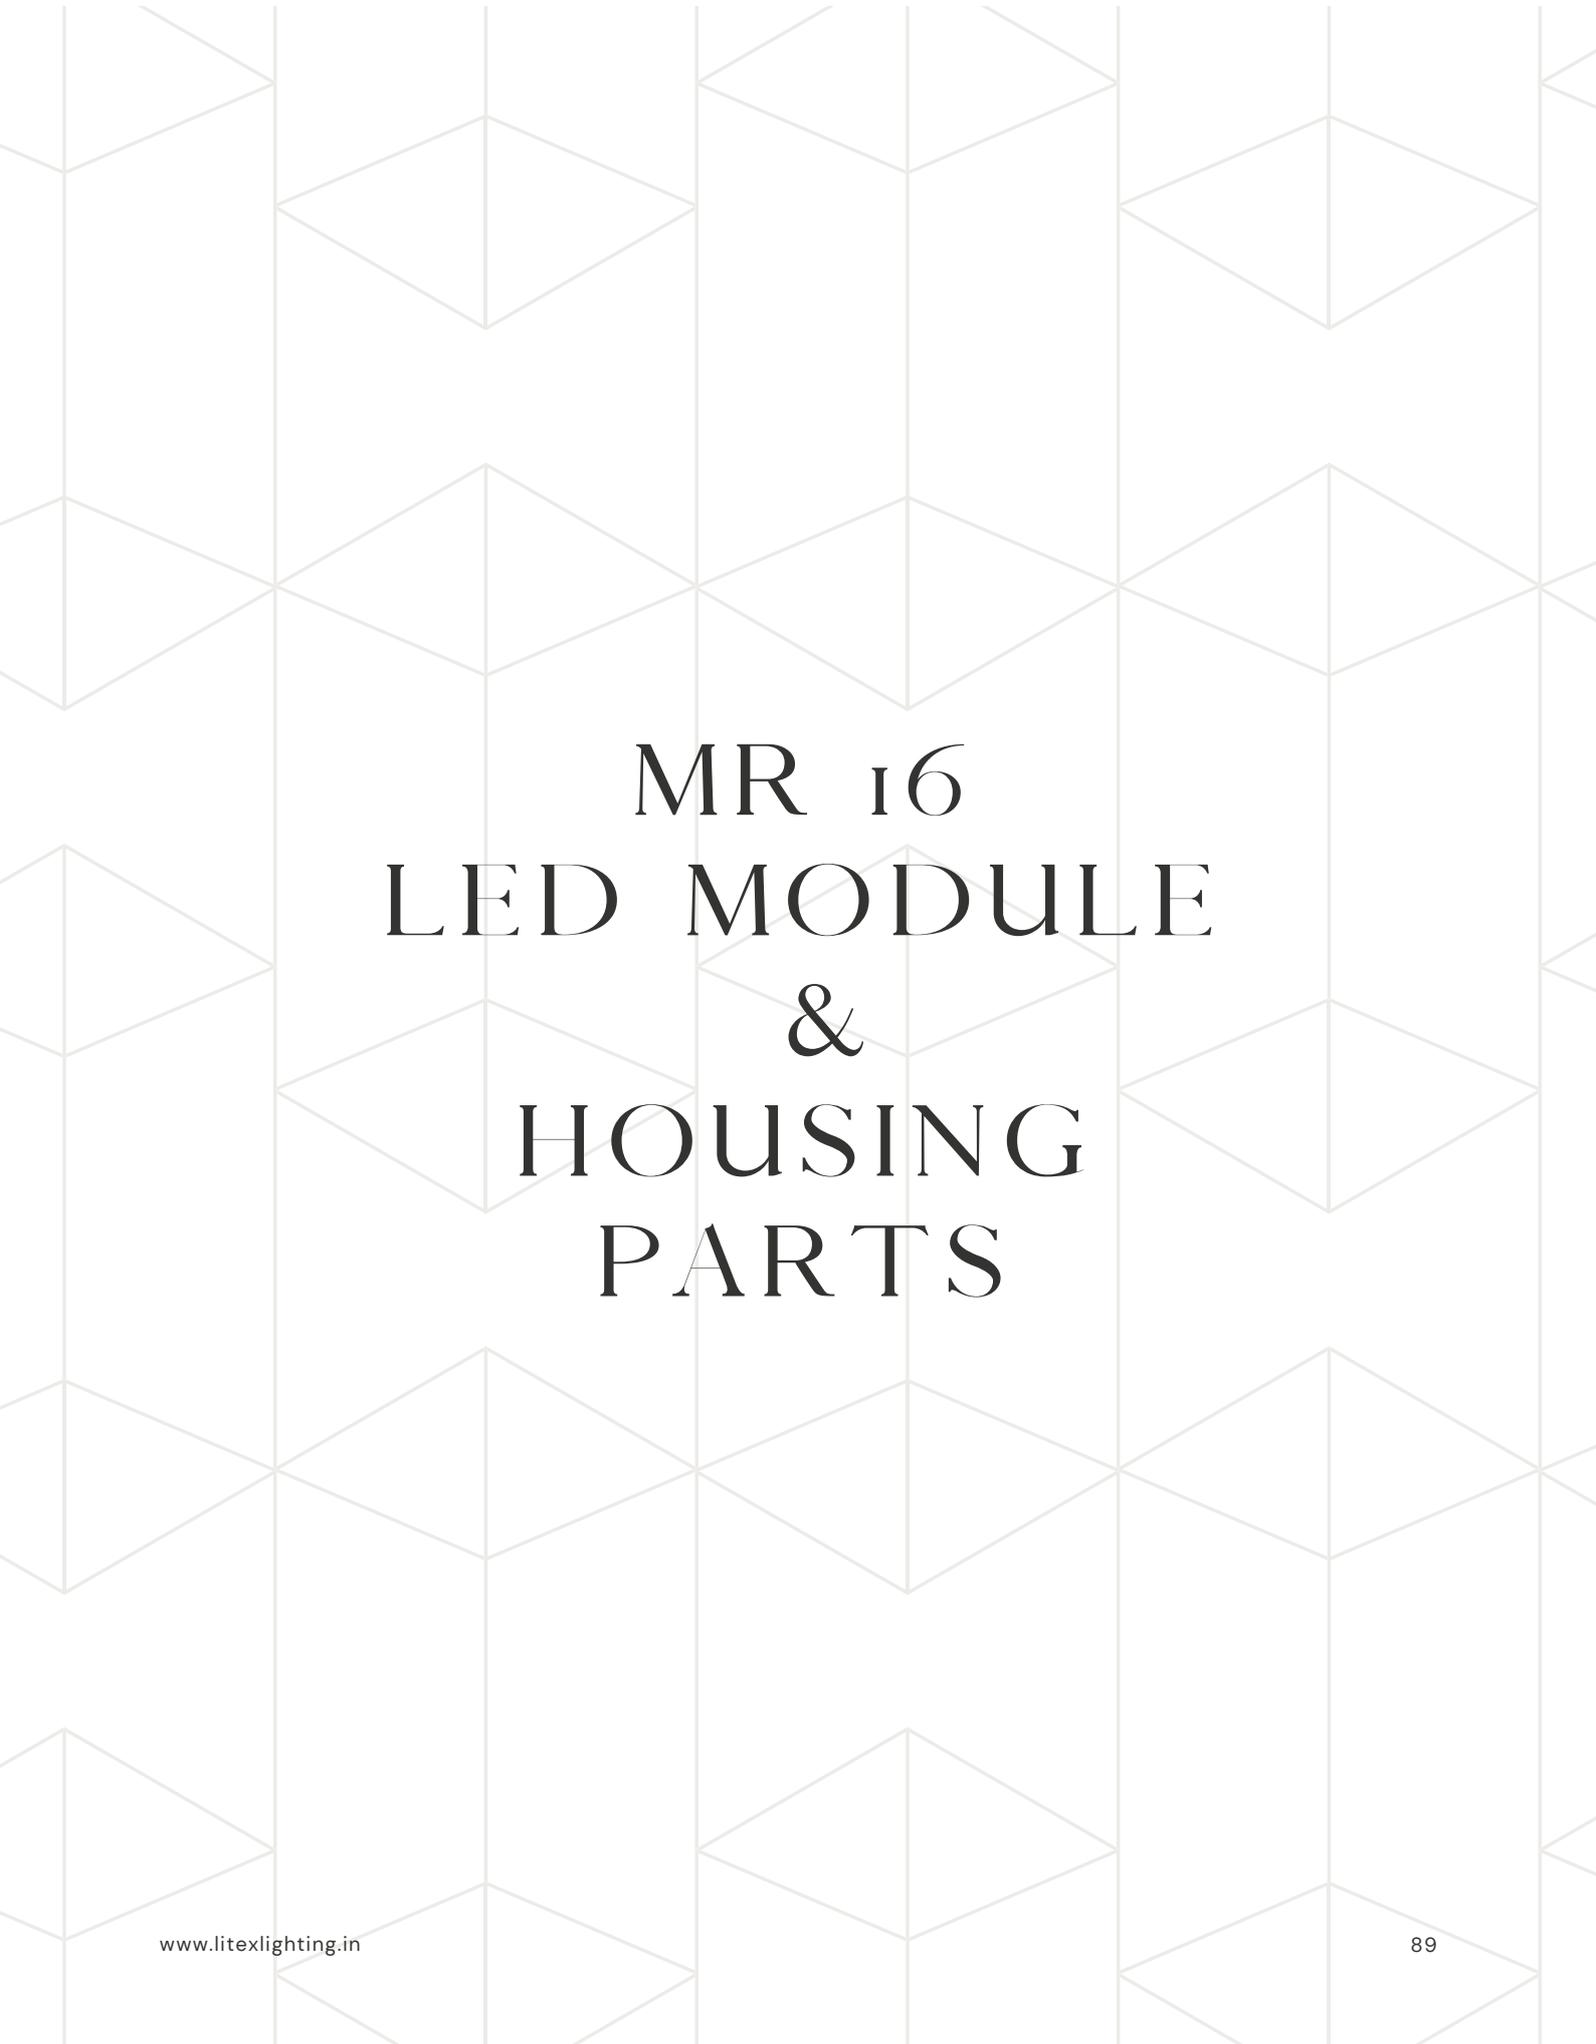

MR 16
LED MODULE
&
HOUSING
PARTS

- LED MODULE



PRODUCT SPECIFICATION

	Wattage	6W	10W	12W
Luminous Flux	3000 K	510 LM	850 LM	1020 LM
	4000 K	540 LM	900 LM	1080 LM
	6000 K	570 LM	950 LM	1140 LM
Dimensions (in MM)	Diameter	50 MM	50 MM	50 MM
	Height	50 MM	65 MM	65 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Cree	Cree	Cree
	Driver Brand	Philips	Philips	Philips

● MR 16 HOUSING

MODEL NO. LT - X090Y

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 90 MM | C - 75 MM | H - 45 MM



MODEL NO. LT - FS085 (IP44)

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 80 MM | C - 60 MM | H - 40 MM



MODEL NO. LT - 6504

MATERIAL : ALUMINIUM
FINISHES : WHITE / BLACK
SIZE : D - 92 MM | C - 77 MM | H - 40 MM



● MR 16 HOUSING

MODEL NO. LT - 6503

MATERIAL : ALUMINIUM
FINISHES: WHITE
SIZE : D - 100 MM | C - 89 MM | H - 54 MM



MODEL NO. LT - 5021
(WALL WASHER)

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 92 MM | C - 82 MM | H - 70 MM



MODEL NO. LT - 6507

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 90 MM X 90 MM | C-75 MM
X 75 MM | H - 45MM



● MR 16 HOUSING

MODEL NO. LT - XX090Y

**MATERIAL : ALUMINIUM
FINISHES: WHITE & BLACK
SIZE : D - 90 MM | C - 80 MM | H - 45 MM**



MODEL NO. LT - 1090

**MATERIAL : ALUMINIUM
FINISHES : WHITE & CHROME
SIZE : D - 92 MM | C - 75 MM | H - 45 MM**



MODEL NO. LT - C093

**MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 90 MM | C - 75 MM | H - 30 MM**



- MR 16 HOUSING

MODEL NO. LT - YO93

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 82 MM | C - 65 MM | H - 30 MM



MODEL NO. LT - 085

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 90 MM | C-75 MM |H- 25 MM



MODEL NO. LT - Z089

MATERIAL : ALUMINIUM
FINISHES: WHITE
SIZE : D - 90 MM | C - 75 MM | H - 30 MM



● MR 16 HOUSING

MODEL NO. LT - GN 1

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 110 MM | C - 90 MM | H - 40 MM



MODEL NO. LT - GN 2

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 200X110 MM | C - 180X90 MM |
H - 40 MM



MODEL NO. LT - 1

MATERIAL : ALUMINIUM
FINISHES: WHITE
SIZE : D - 90X90 MM | C - 70 MM
| H - 25 MM



● MR 16 HOUSING

MODEL NO. LT - 2

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 180X90 MM | C - 150X65 MM |
H - 25 MM



MODEL NO. LT - 3

MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 255X90 MM | C - 230X70 MM |
H - 25 MM



MODEL NO. LT - 4

MATERIAL : ALUMINIUM
FINISHES: WHITE
SIZE : D - 175X175 MM | C - 150X150 MM
| H - 25 MM



● **MR 16 HOUSING** —————


MODEL NO. T26 - 1

**MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 100X100 MM | C - 75X75 MM |
H - 45 MM**



MODEL NO. T26 - 2

**MATERIAL : ALUMINIUM
FINISHES : WHITE
SIZE : D - 100X175 MM | C - 80X150 MM |
H - 45 MM**

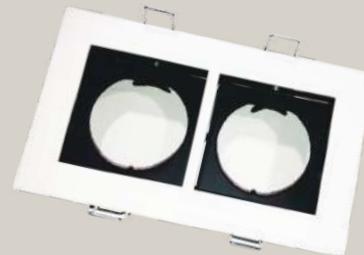

MODEL NO. LT - 8062 - CDMT

**MATERIAL : ALUMINIUM
FINISHES: WHITE
LAMP SOURCE : CDMT - G - 12
SIZE : D - 160 MM | C - 130 MM | H - 145 MM**



● **MR 16 HOUSING** —————

MODEL NO. 6024 - CDMT - TC

**MATERIAL : ALUMINIUM
FINISHES : WHITE
LAMP SOURCE : CDMT - TC
SIZE : D - 125 MM | C - 110 MM | H - 120 MM**



MODEL NO. 940/1

**MATERIAL : ALUMINIUM
FINISHES : WHITE & BLACK
SIZE : D - 77 MM | C - 65 MM | H - 48 MM**



MODEL NO. LT - 940/2

**MATERIAL : ALUMINIUM
FINISHES: WHITE & BLACK
SIZE : D - 77X168 MM | C - 65X145 MM |
H - 48 MM**



- MR 16 HOUSING

MODEL NO. LT - 940/3

MATERIAL : ALUMINIUM

FINISHES : WHITE & BLACK

SIZE : D - 77X240 MM | C - 65X225 MM |

H - 48 MM





ZOOM LIGHTS

• ZOOM LIGHT



MODEL NO. LT - 3072



PRODUCT SPECIFICATION

	Wattage	30W
Luminous Flux	3000 K	2550 LM
	4000 K	2700 LM
	6500 K	2850 LM
Dimensions (in MM)	Diameter	190 MM
	Cutout	160 MM
	Height	120 MM
System Specs	Housing	Aluminium
	LED make	Cree / Lustrous
	Driver Brand	Philips

• ZOOM LIGHT



MODEL NO. LT -915



PRODUCT SPECIFICATION

	Wattage	20W	30W	40W
Luminous Flux	3000 K	1700 LM	2550 LM	3400 LM
	4000 K	1800 LM	2700 LM	3600 LM
	6500 K	1900 LM	2850 LM	3800 LM
Dimensions (in MM)	Diameter	145 MM	145 MM	190 MM
	Cutout	120 MM	120 MM	160 MM
	Height	120 MM	120 MM	120 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Cree	Cree	Cree
	Driver Brand	Philips	Philips	Philips

• ZOOM LIGHT



MODEL NO. LT - 918



PRODUCT SPECIFICATION

	Wattage	15W	20W	30W
Luminous Flux	3000 K	1275 LM	1700 LM	2550 LM
	4000 K	1350 LM	1800 LM	2700 LM
	6500 K	1425 LM	1900 LM	2850 LM
Dimensions (in MM)	Diameter	100 MM	145 MM	145 MM
	Cutout	85 MM	120 MM	120 MM
	Height	85 MM	110 MM	110 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Cree	Cree	Cree
	Driver Brand	Philips	Philips	Philips



TRACK LIGHTS





• TRACK LIGHT

MODEL NO. LT - 1130



PRODUCT SPECIFICATION

	Wattage	20W	30W	40W	50W
Luminous Flux	3000 K	1700 LM	2550 LM	3400 LM	4250 LM
	4000 K	1800 LM	2700 LM	3600 LM	4500 LM
	6500 K	1900 LM	2850 LM	3800 LM	4750 LM
System Specs	Finishes	WHITE / BLACK	WHITE / BLACK	WHITE / BLACK	WHITE / BLACK
	Housing	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM
	LED Make	CREE	CREE	CREE	CREE
	Driver Brand	PHILIPS	PHILIPS	PHILIPS	PHILIPS

• TRACK LIGHT

MODEL NO. LT - 10220 / 10230 / 10240




PRODUCT SPECIFICATION

	Wattage	18 W	28 W
Luminous Flux	3000 K	1520 LM	2240 LM
	4000 K	1710 LM	2660 LM
	6500 K		
System Specs	Finishes	WHITE / BLACK	WHITE / BLACK
	Housing	ALUMINIUM	ALUMINIUM
	LED Make	EPISTAR	EPISTAR
	Driver Brand	LITEX	LITEX

• TRACK LIGHT

MODEL NO. LT - 4019

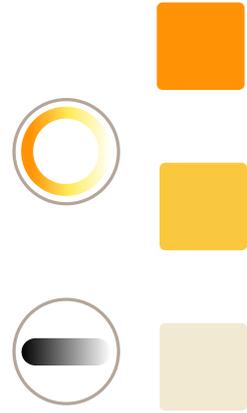


PRODUCT SPECIFICATION

	Wattage	20W	30W
Luminous Flux	3000 K	1700 LM	2550 LM
	4000 K	1800 LM	2700 LM
	6500 K	1900 LM	2850 LM
System Specs	Finishes	WHITE	WHITE
	Housing	ALUMINIUM	ALUMINIUM
	LED Make	CREE	CREE
	Driver Brand	ALLOOKING	ALLOOKING

• TRACK LIGHT

MODEL NO. LT - 11030

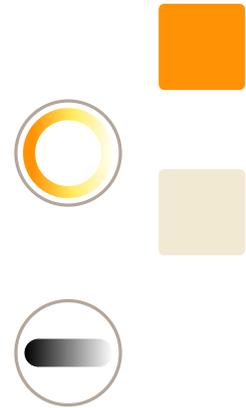

PRODUCT SPECIFICATION

	Wattage	23 W	33 W
Luminous Flux	3000 K	1955 LM	2805 LM
	6000 K	2185 LM	3135 LM
System Specs	Housing	ALUMINIUM	ALUMINIUM
	LED Make	CREE	CREE
	Driver Brand	LITEX	LITEX

● TRACK LIGHT

MODEL NO. LT - 0335



ADJUSTABLE BEAM ANGLE : 15°-60°

PRODUCT SPECIFICATION

	Wattage	35 W
Luminous Flux	3000 K	2975 LM
System Specs	Finishes	WHITE / BLACK
	Housing	ALUMINIUM
	LED Make	CREE
	Driver Brand	LITEX

● TRACK LIGHT

MODEL NO. LT - 4230



PRODUCT SPECIFICATION

	Wattage	23 W
Luminous Flux	3000 K	1955 LM
	4000 K	2075 LM
System Specs	Housing	ALUMINIUM
	LED Make	SHARP
	Driver Brand	LITEX






TRACK
CHANNELS
&
CONNECTORS


- TRACK CHANNELS

MODEL NO. TRACK CHANNEL 2 LINE

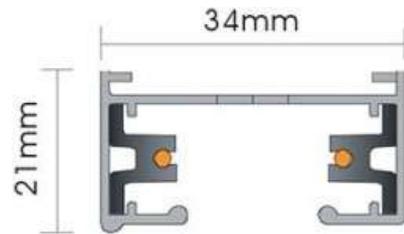

**MATERIAL : ALUMINIUM
FINISHES : WHITE / BLACK**


MODEL NO. TRACK CHANNEL 3 LINE

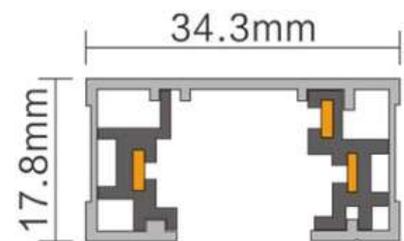

**MATERIAL : ALUMINIUM
FINISHES : WHITE / BLACK**

- TRACK CHANNELS

MODEL NO. TRACK CHANNEL 4 LINE



**MATERIAL : ALUMINIUM
FINISHES : WHITE / BLACK**

MODEL NO. TRACK CHANNEL 2 LINE RECESS



**MATERIAL : ALUMINIUM
FINISHES : WHITE / BLACK**

● TRACK CONNECTORS

MODEL NO. I CONNECTOR 2/3/4 LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK



MODEL NO. T CONNECTOR 2/3/4 LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK



MODEL NO. LIVE END CONNECTOR 2/3/4/LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK



● TRACK CONNECTORS

MODEL NO. L CONNECTOR 2/3/4 LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK



MODEL NO. X CONNECTOR 2/3/4 LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK



MODEL NO. EDP CONNECTOR 2/3/4/ LINE

MATERIAL : PVC
FINISHES : WHITE / BLACK








LED PANEL
&
DOWNLIGHT
SERIES

● LED DOWNLIGHT

MODEL NO. LT - MR 16

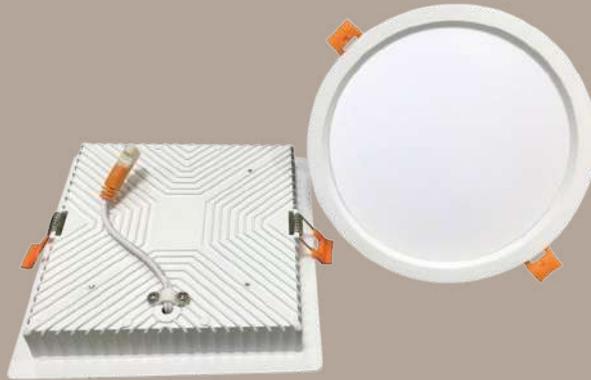

ROUND / SQUARE

PRODUCT SPECIFICATION

	Wattage	16 W	24 W	32 W
Luminous Flux	3000 K	1360 LM	2040 LM	2720 LM
	4000 K	1440 LM	2160 LM	2880 LM
	6500 K	1520 LM	2280 LM	3040 LM
Dimensions (in MM)	Diameter	120 MM	170 MM	225 MM
	Cutout	100 MM	150 MM	200 MM
	Height	30 MM	30 MM	30 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Epistar	Epistar	Epistar
	Driver Brand	Litex	Litex	Litex

• LED DOWNLIGHT

MODEL NO. LT - 1012/1018/1030



PRODUCT SPECIFICATION - STEAM PROOF IP44

	Wattage	12W	18W	30W
Luminous Flux	3000 K	1020 LM	1530 LM	2720 LM
	4000 K	1080 LM	1620 LM	2880 LM
	6500 K	1140 LM	1710 LM	3040 LM
Dimensions (in MM)	Diameter	110 MM	160 MM	215 MM
	Cutout	95 MM	145 MM	195 MM
	Height	30 MM	30 MM	30 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Seoul	Seoul	Seoul
	Driver Brand	Litex	Litex	Litex

● LED PANEL SERIES

MODEL NO. SLIM PANEL



ROUND

PRODUCT SPECIFICATION

	Wattage	8 W	15 W	22 W
Luminous Flux	3000 K	680 LM	1275 LM	1870 LM
	4000 K	720 LM	1355 LM	1980 LM
	6500 K	760 LM	1425 LM	2090 LM
Dimensions (in MM)	Diameter	90 MM	150 MM	170 MM
	Cutout	75 MM	130 MM	150 MM
	Height	25 MM	25 MM	25 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED Make	Epistar	Epistar	Epistar
	Driver Brand	Litex	Litex	Litex

- LED PANEL SERIES

MODEL NO. LT - 1 X 4



PRODUCT SPECIFICATION

	Wattage	48 W
Luminous Flux	3000 K	4080 LM
Dimensions (in MM)	Diameter Height	300 MM X 1200 MM 15 MM
System Specs	Housing LED Make Driver Brand	Aluminium Epistar Litex



LED FOOT LIGHTS





- LED FOOT LIGHTS



PRODUCT SPECIFICATION

	Wattage	3W
Luminous Flux	Blue	270 LM
Dimensions (in MM)	Diameter	115 MM X 75 MM
	Cutout	65 MM X 65 MM
	Height	30 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Litex

- LED FOOT LIGHTS

MODEL NO. LT - F3



PRODUCT SPECIFICATION

	Wattage	1W
Luminous Flux	3000 K	85 LM
Dimensions (in MM)	Diameter	45 MM X 45 MM
	Cutout	40 MM
	Height	65 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Litex

- LED FOOT LIGHTS

MODEL NO. LT - F45



PRODUCT SPECIFICATION

	Wattage	1W
Luminous Flux	3000 K	85 LM
Dimensions (in MM)	Diameter	45 MM X 45 MM
	Cutout	30 MM
	Height	25 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Litex

- LED FOOT LIGHTS

MODEL NO. LT - 125




PRODUCT SPECIFICATION

	Wattage	3W
Luminous Flux	3000 K	255 LM
Dimensions (in MM)	Diameter	80 MM X 80 MM
	Cutout	65 MM
	Height	50 MM
System Specs	Housing	Aluminium
	LED Make	Edison
	Driver Brand	Litex





WALL LIGHT

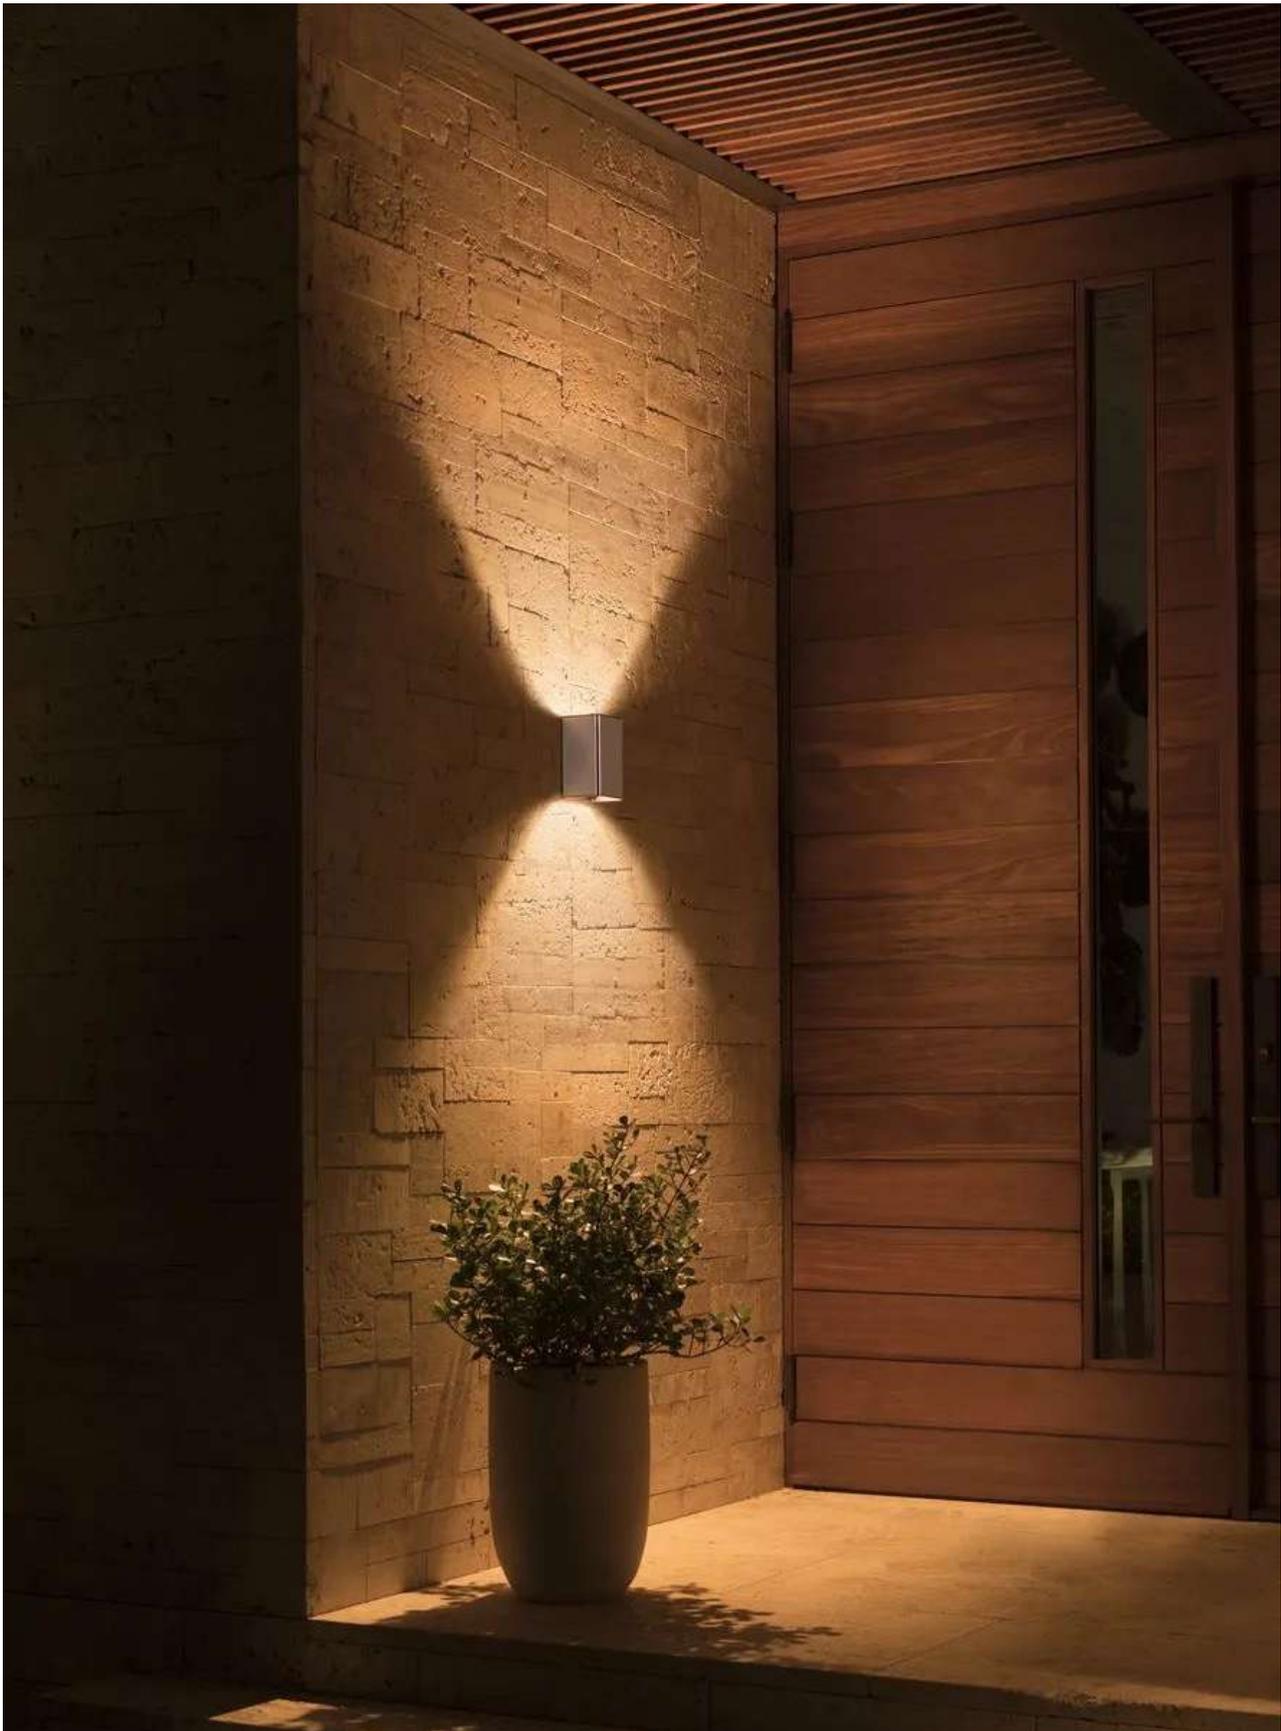



• WALL LIGHTS

MODEL NO. : LT - 201 / 202 / 203



PRODUCT SPECIFICATION

	Wattage	6 W	12 W	18 W
Luminous Flux	3000 K	510 LM	1020 LM	1530 LM
	4000 K	540 LM	1080 LM	1620 LM
	6500 K	570 LM	1140 LM	1710 LM
Dimensions (in MM)	Height	80 MM	80 MM	80 MM
	Length	140 MM	240 MM	340 MM
	Width	100 MM	100 MM	100 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 204



PRODUCT SPECIFICATION

	Wattage	6 W
Luminous Flux	3000 K	510 LM
	4000 K	540 LM
	6500 K	570 LM
Dimensions (in MM)	Height	110 MM
	Length	210 MM
	Width	40 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 205



PRODUCT SPECIFICATION

	Wattage	5 W
Luminous Flux	3000 K	425 LM
	4000 K	450 LM
	6500 K	475 LM
Dimensions (in MM)	Height	155 MM
	Length	155 MM
	Width	80 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 207



PRODUCT SPECIFICATION

	Wattage	6 W
Luminous Flux	3000 K	510 LM
	4000 K	540 LM
	6500 K	570 LM
Dimensions (in MM)	Height	165 MM
	Length	110 MM
	Width	110 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 208



PRODUCT SPECIFICATION

	Wattage	6 W
Luminous Flux	3000 K	510 LM
	4000 K	540 LM
	6500 K	570 LM
Dimensions (in MM)	Height	50 MM
	Length	170 MM
	Width	130 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 209



PRODUCT SPECIFICATION

	Wattage	12W
Luminous Flux	3000 K	1020 LM
	4000 K	1080 LM
	6500 K	1140 LM
Dimensions (in MM)	Height	50 MM
	Length	270 MM
	Width	130 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 210 / 211 / 212




PRODUCT SPECIFICATION

	Wattage	6 W	9 W	12 W
Luminous Flux	3000 K	510 LM	765 LM	1020 LM
	4000 K	540 LM	810 LM	1080 LM
	6500 K	570 LM	855 LM	1140 LM
Dimensions (in MM)	Height	65 MM	65 MM	65 MM
	Length	185 MM	265 MM	360 MM
	Width	125 MM	125 MM	125 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 213 / 214

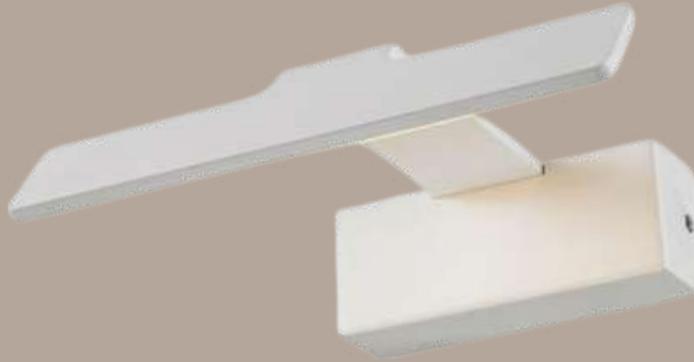

PRODUCT SPECIFICATION

	Wattage	6 W	12 W
Luminous Flux	3000 K	510 LM	1020 LM
	4000 K	540 LM	1080 LM
	6500 K	570 LM	1140 LM
Dimensions (in MM)	Height	50 MM	50 MM
	Length	170 MM	270 MM
	Width	190 MM	190 MM
System Specs	Housing	Aluminium	Aluminium
	LED make	Edison	Edison
	Driver Brand	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 215 / 216 / 217



PRODUCT SPECIFICATION

	Wattage	3W	6W	9W
Luminous Flux	3000 K	255 LM	510 LM	765 LM
	4000 K	270 LM	540 LM	810 LM
	6500 K	285 LM	570 LM	855 LM
Dimensions (in MM)	Height	130 MM	130 MM	130 MM
	Length	80 MM	230 MM	380 MM
	Width	180 MM	180 MM	180 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 218 / 219 / 220 / 236



PRODUCT SPECIFICATION

	Wattage	10W	20W UP/DL	40W	60W
Luminous Flux	3000 K	850 LM	1700 LM	3400 LM	5100 LM
	4000 K	900 LM	1800 LM	3600 LM	5400 LM
	6500 K	950 LM	1900 LM	3800 LM	5700 LM
Dimensions (in MM)	Height	110 MM	125 MM	120 MM	130 MM
	Length	110 MM	220 MM	430 MM	610 MM
	Width	60 MM	60 MM	60 MM	50 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 237 / 226 / 227 / 228



PRODUCT SPECIFICATION

	Wattage	5W	10W	20W	30W
Luminous Flux	3000 K	425 LM	850 LM	1700 LM	2550 LM
	4000 K	450 LM	900 LM	1800 LM	2700 LM
	6500 K	475 LM	950 LM	1900 LM	2850 LM
Dimensions (in MM)	Height	75 MM	70 MM	75 MM	75 MM
	Length	75 MM	75 MM	420 MM	610 MM
	Width	55 MM	55 MM	55 MM	55 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 221 / 222 / 223 / 225



PRODUCT SPECIFICATION

	Wattage	1W	2W	3W	5W
Luminous Flux	3000 K	85 LM	170 LM	255 LM	425 LM
	4000 K	90 LM	180 LM	270 LM	450 LM
	6500 K	95 LM	190 LM	285 LM	475 LM
Dimensions (in MM)	Height	65 MM	65 MM	65 MM	65 MM
	Length	115 MM	115 MM	240 MM	330 MM
	Width	40 MM	40 MM	40 MM	40 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 224



PRODUCT SPECIFICATION

	Wattage	4W
Luminous Flux	3000 K	340 LM
	4000 K	360 LM
	6500 K	380 LM
Dimensions (in MM)	Height	160 MM
	Length	160 MM
	Width	40 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 225



PRODUCT SPECIFICATION

	Wattage	8 W
Luminous Flux	3000 K	680 LM
	4000 K	720 LM
	6500 K	760 LM
Dimensions (in MM)	Height	160 MM
	Length	160 MM
	Width	40 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 250 / 252



PRODUCT SPECIFICATION

	Wattage	3 W	6 W
Luminous Flux	3000 K	255 LM	510 LM
	4000 K	270 LM	540 LM
	6500 K	285 LM	570 LM
Dimensions (in MM)	Height	35 MM	35 MM
	Length	60 MM	60 MM
	Width	80 MM	80 MM
System Specs	Housing	Aluminium	Aluminium
	LED make	Edison	Edison
	Driver Brand	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 229 / 230 / 231



PRODUCT SPECIFICATION

	Wattage	6W	12W	18W
Luminous Flux	3000 K	510 LM	1020 LM	1530 LM
	4000 K	540 LM	1080 LM	1620 LM
	6500 K	570 LM	1080 LM	1710 LM
Dimensions (in MM)	Height	50 MM	50 MM	50 MM
	Length	185 MM	310 MM	470 MM
	Width	140 MM	140 MM	140 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 232




PRODUCT SPECIFICATION

	Wattage	6 W + 12 W
Luminous Flux	3000 K	1020 LM
	4000 K	1080 LM
	6500 K	1140 LM
Dimensions (in MM)	Height	225 MM
	Length	215 MM
	Width	70 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 233

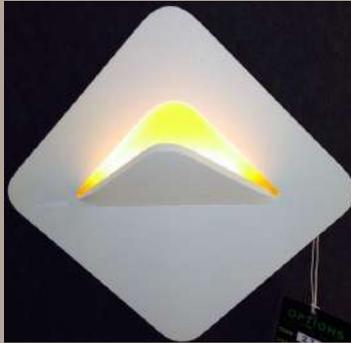

PRODUCT SPECIFICATION

	Wattage	3W
Luminous Flux	3000 K	225 LM
	4000 K	270 LM
	6500 K	285 LM
Dimensions (in MM)	Height	200 MM
	Length	200 MM
	Width	70 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 1320 / 1330



PRODUCT SPECIFICATION

	Wattage	8 W	12 W
Luminous Flux	3000 K	720 LM	1080 LM
Dimensions (in MM)	Height	90 MM	90 MM
	Length	200 MM	315 MM
	Width	35 MM	35 MM
System Specs	Housing	Aluminium	Aluminium
	LED make	Edison	Edison
	Driver Brand	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 234




PRODUCT SPECIFICATION

	Wattage	6 W
Luminous Flux	3000 K	510 LM
	4000 K	540 LM
	6500 K	570 LM
Dimensions (in MM)	Height	100 MM
	Length	220 MM
	Width	100 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 239

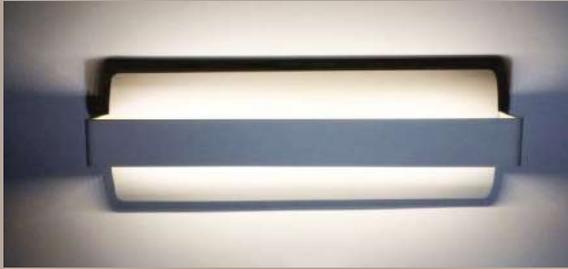

PRODUCT SPECIFICATION

	Wattage	18 W
Luminous Flux	3000 K	1360 LM
	4000 K	1620 LM
	6500 K	1710 LM
Dimensions (in MM)	Height	120 MM
	Length	350 MM
	Width	100 MM
System Specs	Housing	Aluminium
	LED make	Edison
	Driver Brand	Philips

• WALL LIGHTS

MODEL NO. : LT - 240 / 241 / 242 / 243



PRODUCT SPECIFICATION

	Wattage	5W	10W	15W	6W
Luminous Flux	3000 K	425 LM	850 LM	1275 LM	510 LM
	4000 K	450 LM	900 LM	1350 LM	540 LM
	6500 K	475 LM	950 LM	1425 LM	570 LM
Dimensions (in MM)	Height	65 MM	65 MM	65 MM	65 MM
	Length	110 MM	280 MM	450 MM	620 MM
	Width	55 MM	55 MM	55 MM	55 MM
System Specs	Housing	Aluminium	Aluminium	Aluminium	Aluminium
	LED make	Edison	Edison	Edison	Edison
	Driver Brand	Philips	Philips	Philips	Philips

• WALL LIGHTS

MODEL NO. : LT - 244 / 238



PRODUCT SPECIFICATION

	Wattage	6 W	12 W
Luminous Flux	3000 K	510 LM	1020 LM
	4000K	540 LM	1080 LM
	6500K	570 LM	1140 LM
Dimensions (in MM)	Height	45 MM	45 MM
	Length	255 MM	400 MM
	Width	125 MM	125 MM
System Specs	Housing	Aluminium	Aluminium
	LED make	Edison	Edison
	Driver Brand	Philips	Philips





www.litexlighting.in